

RZM 15-0800

RZM 18-0800

Technical Data


	Nominal motor power kW	Poles	Motor size	Motor voltage V	Phases	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. fan speed 1/min	Max. operating frequency Hz	Weight kg
RZM 15-												
0800-6W-28	11.0	6	160L	400	3~	50	△	22.5	975	960	49	524
0800-6W-31	15.0	6	180L	400	3~	50	△	31.0	975	1050	54	562
0800-6W-33	18.5	6	200L	400	3~	50	△	36.0	978	1130	58	681
0800-6W-34	22.0	6	200L	400	3~	50	△	42.5	978	1200	61	681
0800-6W-37	30.0	6	225M	400	3~	50	△	57.0	980	1330	67	751
0800-6W-39	37.0	6	250M	400	3~	50	△	70.0	982	1430	72	898
RZM 18-	kW			V		Hz		A	1/min	1/min	Hz	kg
0800-4D-37	45.0	4	225M	400	3~	50	△	82.0	1475	1510	51	865
0800-4D-39	55.0	4	250M	400	3~	50	△	101.0	1480	1615	54	970

Motor code:

- W = Asynchronous motor (efficiency class IE2)
- D = Asynchronous motor

Dimensions in mm, subject to change.

RZM 15-0800
RZM 18-0800

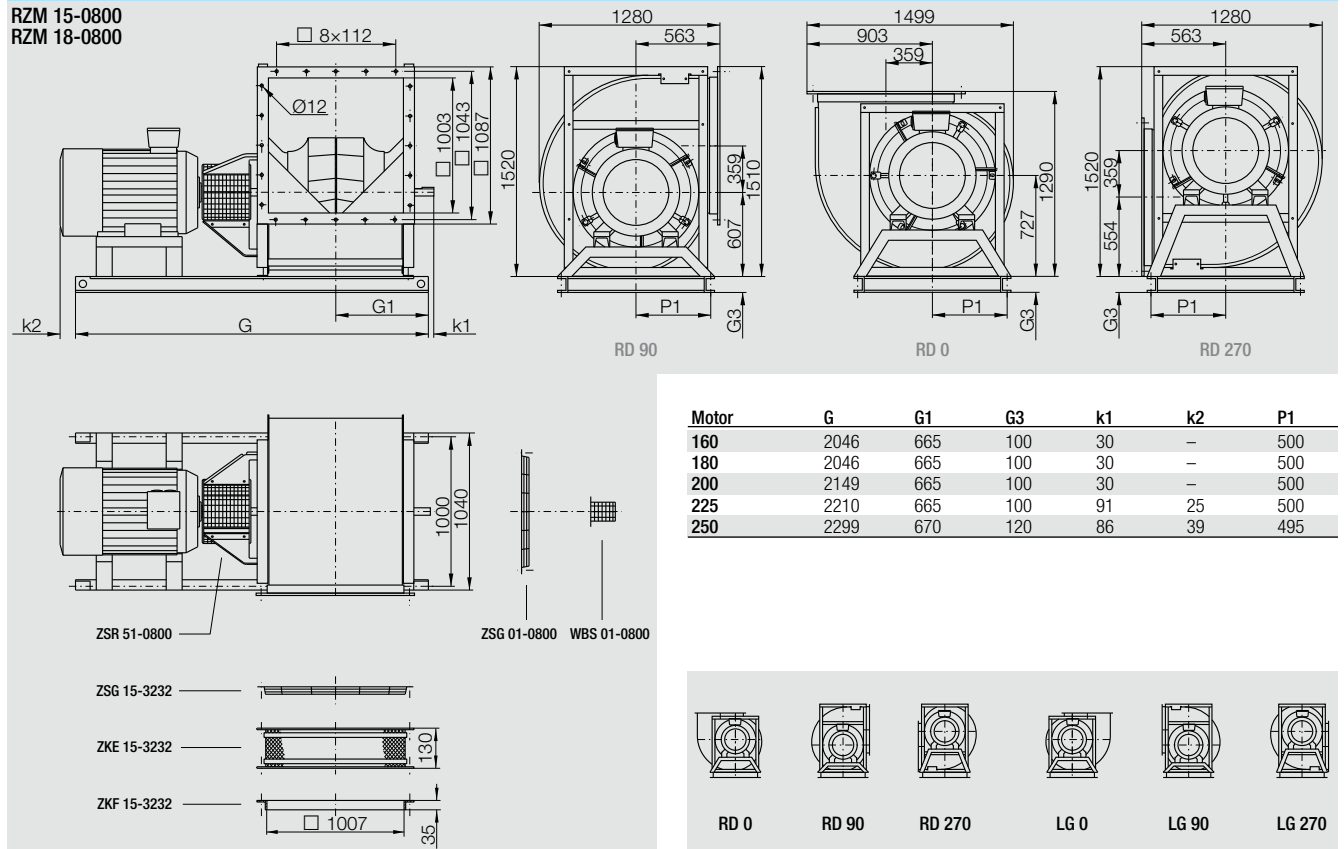

Accessories

	Frequency Inverter Unit MM420 for 3~	Line Choke for 3~	Frequency inverter 6SE6430-	Control Panel for frequency inverter 6SE6420- and 6SE6430-
RZM 15-				
0800-6W-28	MM420 3AC 400V 11.0KW EMV B	6SE6400-3CC02-5CD3	-	-
0800-6W-31	-	6SE6400-3CC04-4DD0	6SE6430-2AD31-8DA0	6SE6400-0BE00-0AA0
0800-6W-33	-	6SE6400-3CC04-4DD0	6SE6430-2AD32-2DA0	6SE6400-0BE00-0AA0
0800-6W-34	-	6SE6400-3CC05-2DD0	6SE6430-2AD33-0DA0	6SE6400-0BE00-0AA0
0800-6W-37	-	6SE6400-3CC08-3ED0	6SE6430-2AD33-7EA0	6SE6400-0BE00-0AA0
0800-6W-39	-	6SE6400-3CC08-3ED0	6SE6430-2AD33-7EA0	6SE6400-0BE00-0AA0
RZM 18-				
0800-4D-37	-	6SE6400-3CC08-3ED0	6SE6430-2AD34-5EA0	6SE6400-0BE00-0AA0
0800-4D-39	-	6SE6400-3CC11-2FD0	6SE6430-2AD35-5FA0	6SE6400-0BE00-0AA0