

RZM 15-1000

RZM 18-1000

Technical Data


	Nominal motor power kW	Poles	Motor size	Motor voltage V	Phases	Nominal frequency Hz	Connection	Nominal motor current A	Nominal motor speed 1/min	Max. fan speed 1/min	Max. operating frequency Hz	Weight kg
RZM 15-												
1000-8D-33	15.0	8	200La	400	3~	50	△	32.5	725	735	50	925
1000-8D-36	18.5	8	225S	400	3~	50	△	38.5	730	790	54	995
1000-8D-37	22.0	8	225M	400	3~	50	△	45.0	730	840	57	995
1000-8D-39	30.0	8	250Ma	400	3~	50	△	58.0	730	930	63	1165
1000-6W-39	37.0	6	250M	400	3~	50	△	70.0	982	995	50	1165
1000-6W-41	45.0	6	280S	400	3~	50	△	83.0	985	1060	53	1386
1000-6W-42	55.0	6	280M	400	3~	50	△	99.0	985	1140	57	1386
RZM 18-												
1000-6W-44	75.0	6	315S	400	3~	50	△	138.0	988	1265	64	1640

Motor code:

- W = Asynchronous motor (efficiency class IE2)
- D = Asynchronous motor

Dimensions in mm, subject to change.

RZM 15-1000
RZM 18-1000

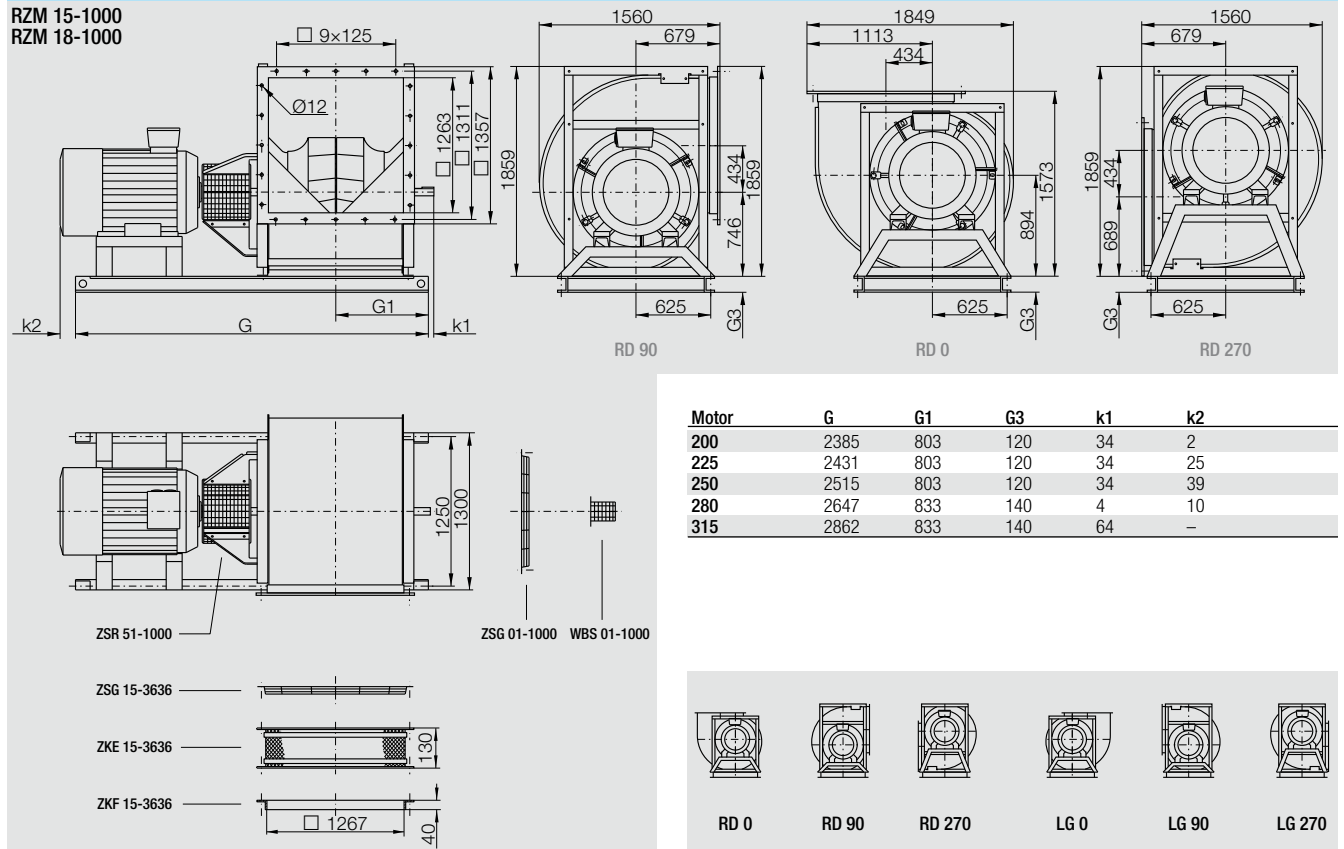

Accessories

	Frequency inverter 6SE6430-	Control Panel for frequency inverter 6SE6420- and 6SE6430-	Line Choke for 3~
RZM 15-			
1000-8D-33	6SE6430-2AD31-8DA0	6SE6400-0BE00-0AA0	6SE6400-3CC04-4DD0
1000-8D-36	6SE6430-2AD32-2DA0	6SE6400-0BE00-0AA0	6SE6400-3CC04-4DD0
1000-8D-37	6SE6430-2AD33-0DA0	6SE6400-0BE00-0AA0	6SE6400-3CC05-2DD0
1000-8D-39	6SE6430-2AD33-0DA0	6SE6400-0BE00-0AA0	6SE6400-3CC05-2DD0
1000-6W-39	6SE6430-2AD33-7EA0	6SE6400-0BE00-0AA0	6SE6400-3CC08-3ED0
1000-6W-41	6SE6430-2AD34-5EA0	6SE6400-0BE00-0AA0	6SE6400-3CC08-3ED0
1000-6W-42	6SE6430-2AD35-5FA0	6SE6400-0BE00-0AA0	6SE6400-3CC11-2FD0
RZM 18-			
1000-6W-44	6SE6430-2AD38-8FA0	6SE6400-0BE00-0AA0	6SE6400-3CC11-7FD0