




Type: **ASA 350-4H.G5S-S1**

Part no.:



Curve:

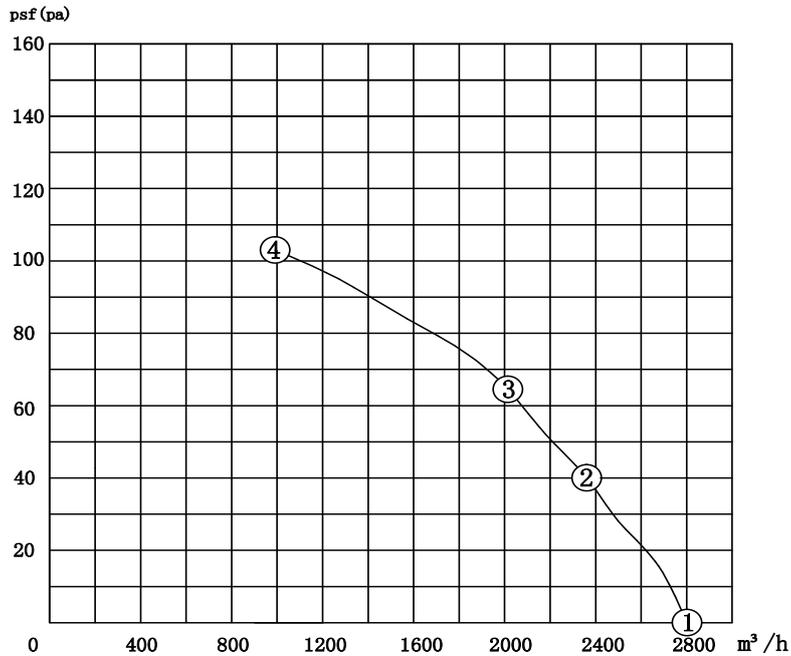

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	0,59	128	1391	2800	
2	40	0,64	139	1401	2357	
3	64	0,69	150	1353	2022	MAX EFF.
4	103	0,89	196	1208	987	IMAX

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


Nominal Data:

U [V]	f [Hz]	C [µF]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _R [°C]	k ₁₀ [m²/s/h]	Noise dB(A)	IP	m [kg]
1~220	50	4	0,15	0,69	1353	-40 ... +80	-	63	IP 54	5,5



Type: **ASA 350-4H.G5S-S1**

Part no.:

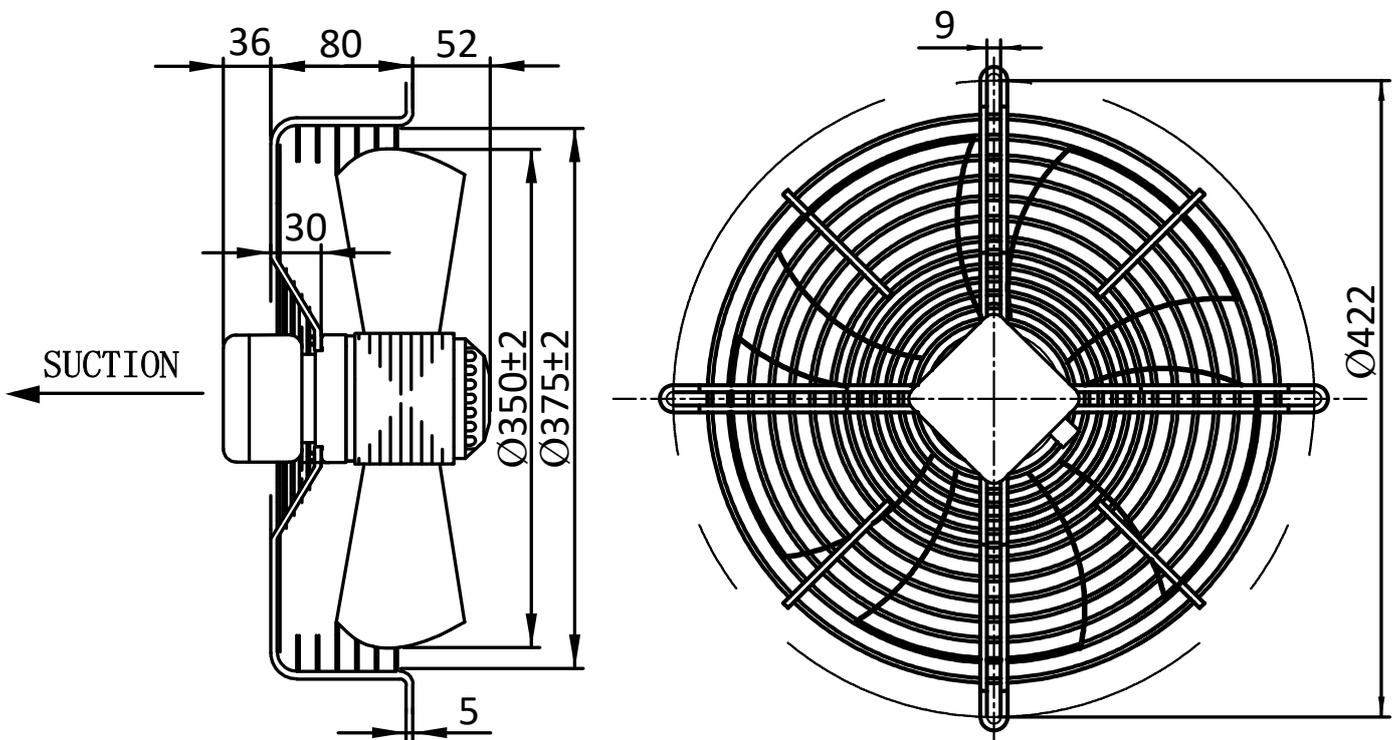




Type: **ASA 350-4H.G5S-S1**

Part no.:



Wirning diagram:

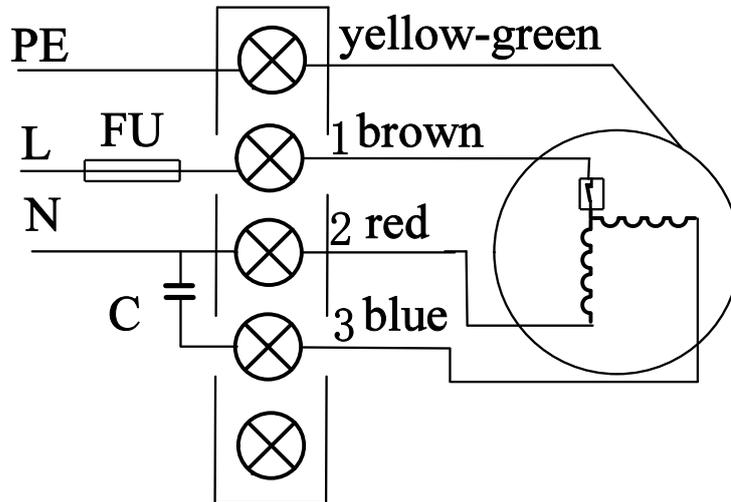

The external wirning diagram:

