




Type: **ASA 450-4J.G5S-S1**

Part no.:



Curve:

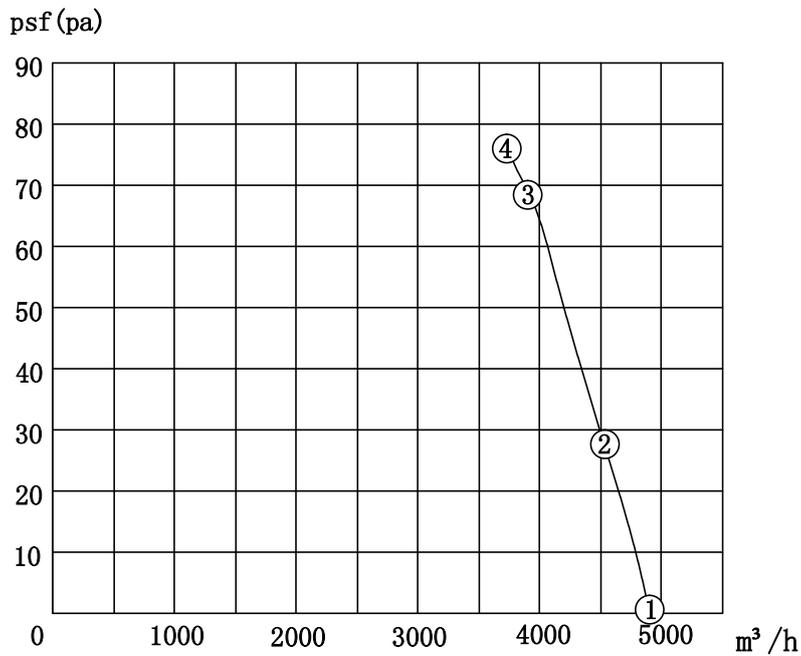

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	0,93	204	1394	4900	
2	27	1,01	222	1374	4534	
3	68	1,15	250	1339	3993	MAX EFF.
4	74	1,17	257	1324	3719	IMAX

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


Nominal Data:

U [V]	f [Hz]	C [µF]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _R [°C]	k ₁₀ [m²/s/h]	Noise dB(A)	IP	m [kg]
1~220	50	8	0,25	1,15	1339	-40 ... +80	-	68	IP 54	8,2



Type: **ASA 450-4J.G5S-S1**

Part no.:

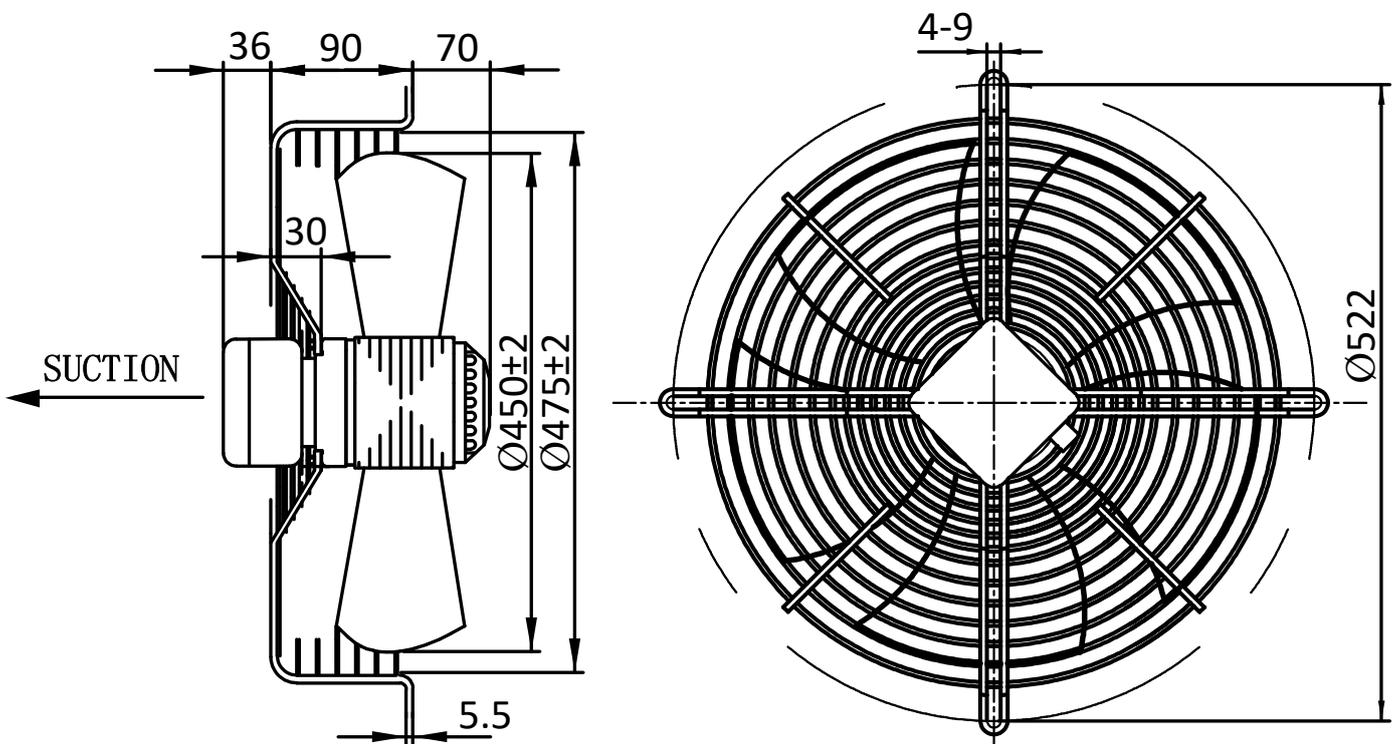




Type: **ASA 450-4J.G5S-S1**

Part no.:



Wirning diagram:

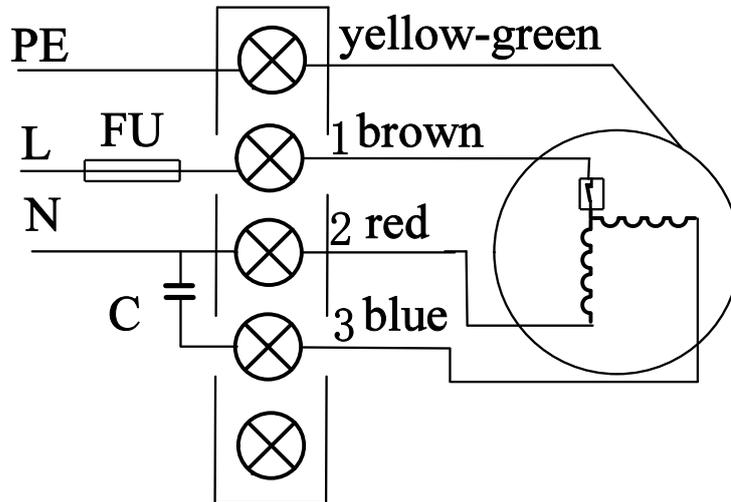

The external wirning diagram:

