




Type: **ASA 500-4K.G5S-S1**

Part no.:



## Curve:

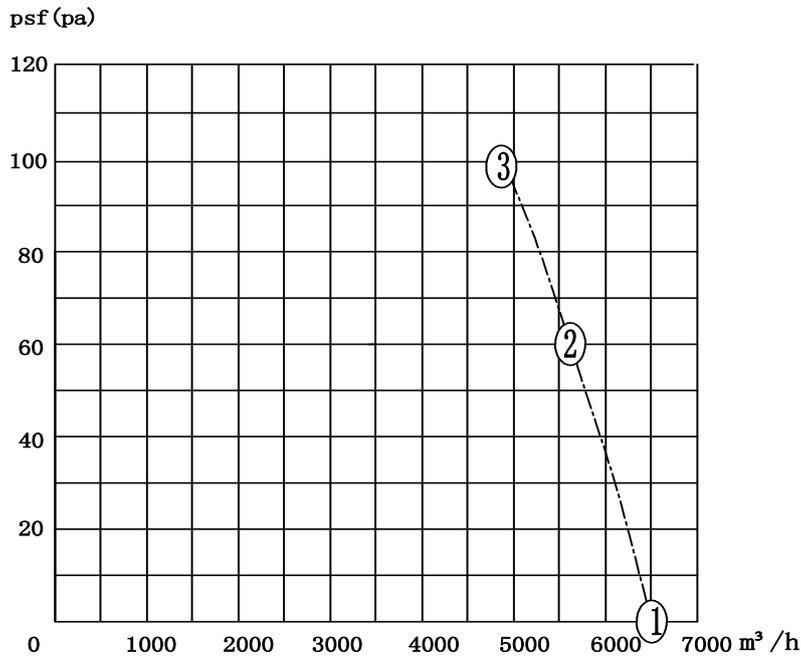

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	1,56	342	1380	6542	
2	60	1,79	394	1345	5609	
3	98	1,91	420	1323	4923	MAX EFF.

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


## Nominal Data:

U [V]	f [Hz]	C [µF]	P <sub>ed</sub> [kW]	I <sub>N</sub> [A]	n <sub>N</sub> [r/min]	t <sub>R</sub> [°C]	k <sub>10</sub> [m²/s/h]	Noise dB(A)	IP	m [kg]
1~220	50	10	0,42	1,91	1323	-40 ... +80	-	70	IP 54	9,1



Type: **ASA 500-4K.G5S-S1**

Part no.:

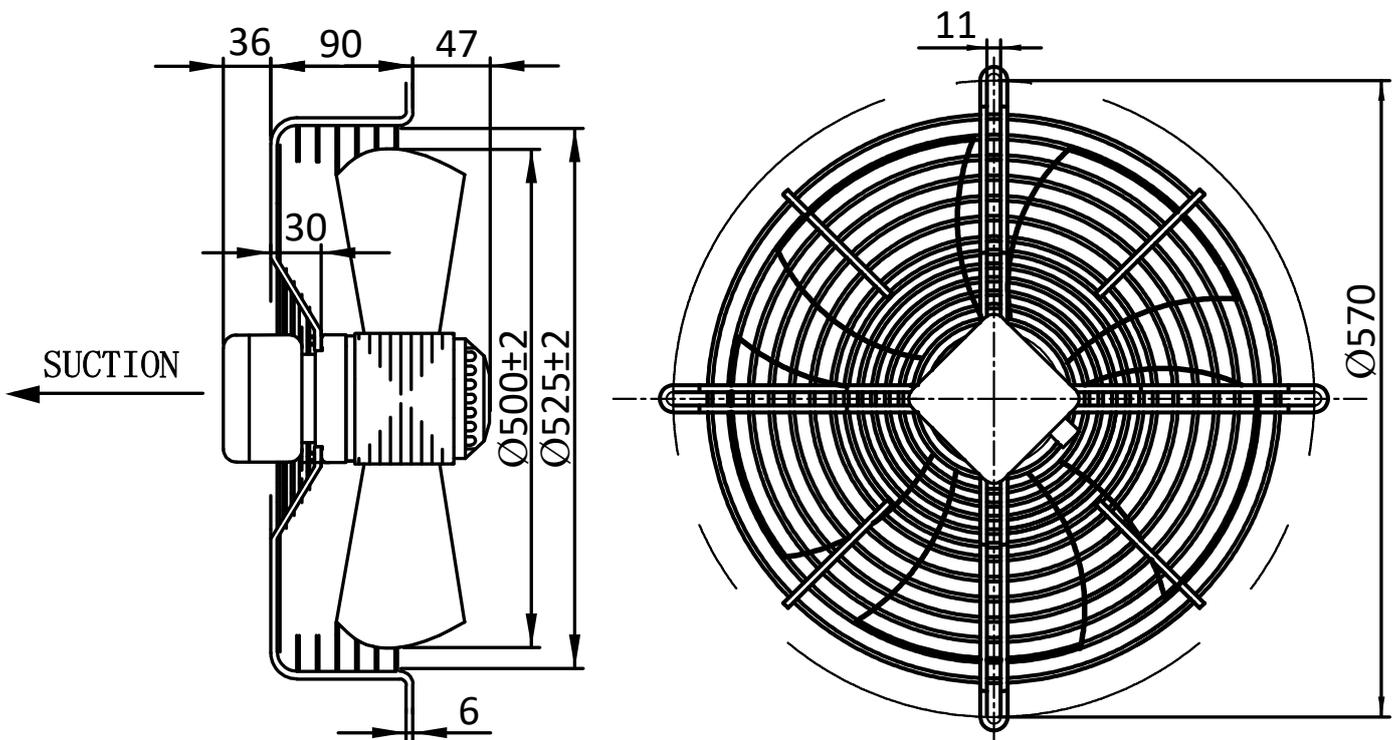




Type: **ASA 500-4K.G5S-S1**

Part no.:



Wirning diagram:

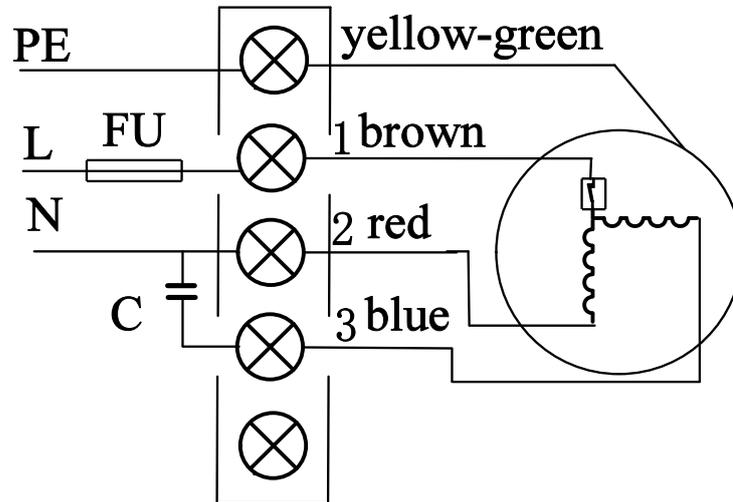

The external wirning diagram:

