




Type: **ASA 500-40.G5S-S1**

Part no.:



Curve:

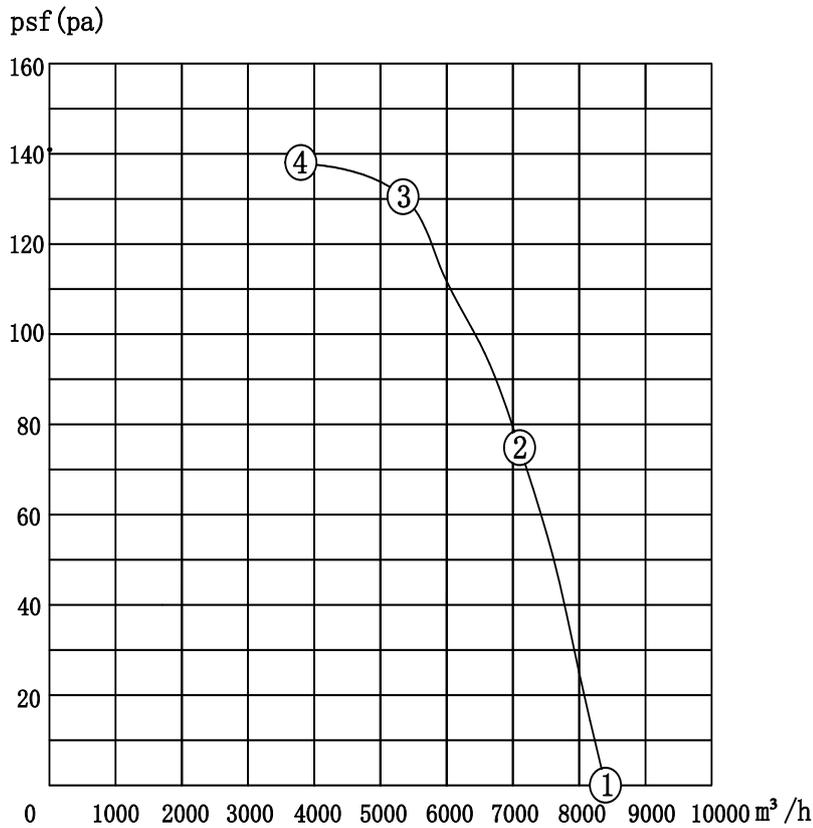

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	2,76	604	1396	8398	
2	75	3,03	667	1377	7126	
3	131	3,24	710	1364	5296	MAX EFF.
4	138	3,30	727	1359	3767	IMAX

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


Nominal Data:

U [V]	f [Hz]	C [µF]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _r [°C]	k ₁₀ [m²/s/h]	Noise dB(A)	IP	m [kg]
1~220	50	-	0,71	3,24	1364	-40 ... +70	-	73	IP 54	11,4



Type: **ASA 500-40.G5S-S1**

Part no.:

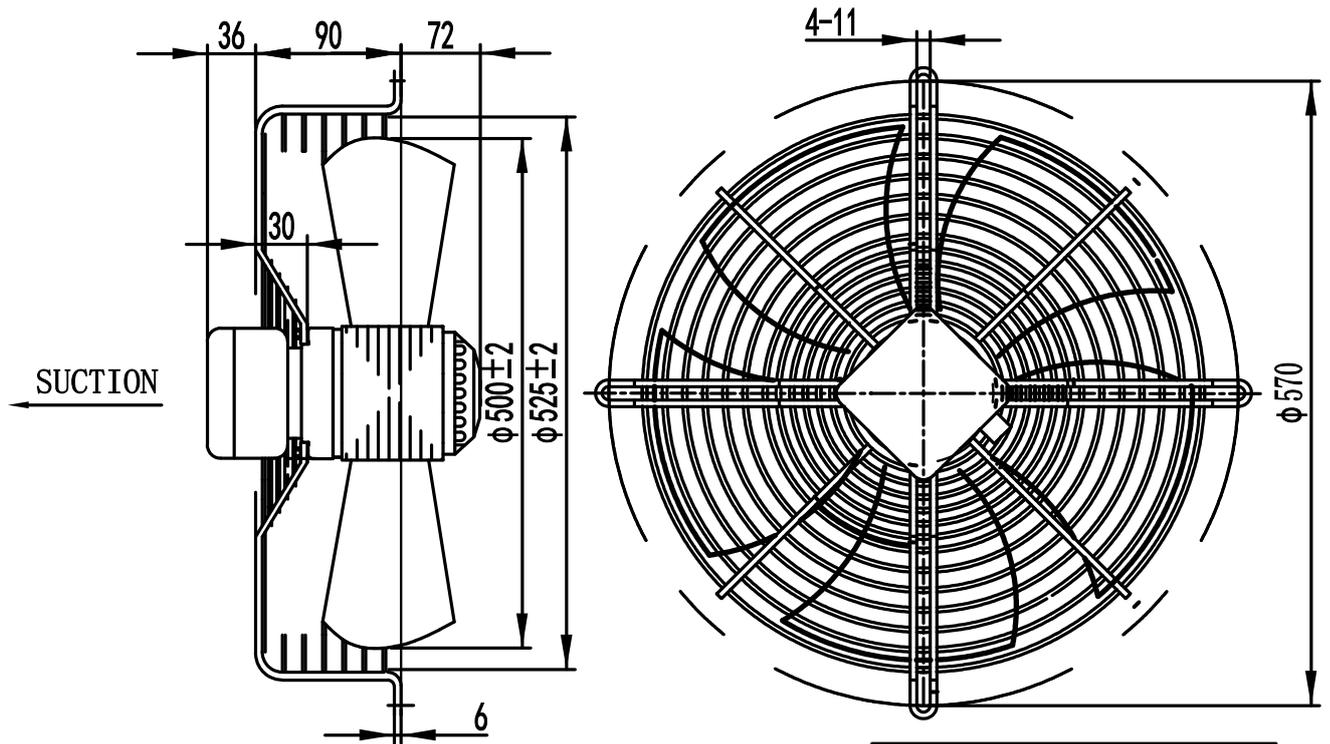




Type: **ASA 500-40.G5S-S1**

Part no.:



Wirning diagram:

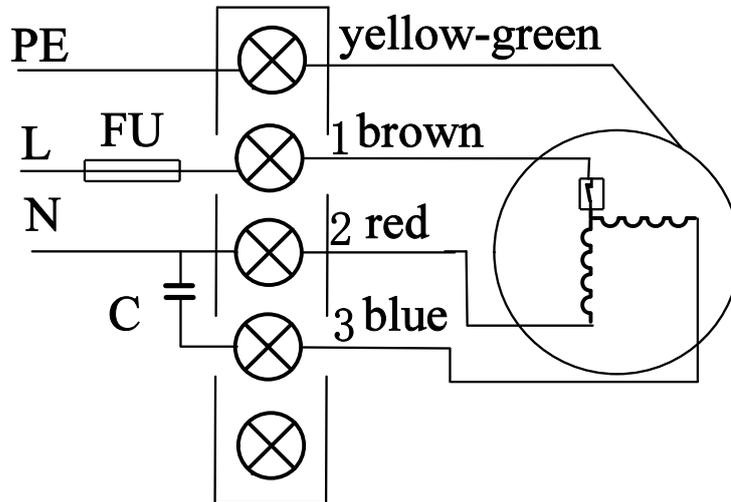

The external wirning diagram:

