




Type: **ASA 630-6P.G5S-S1**

Part no.:



Curve:

psf (pa)

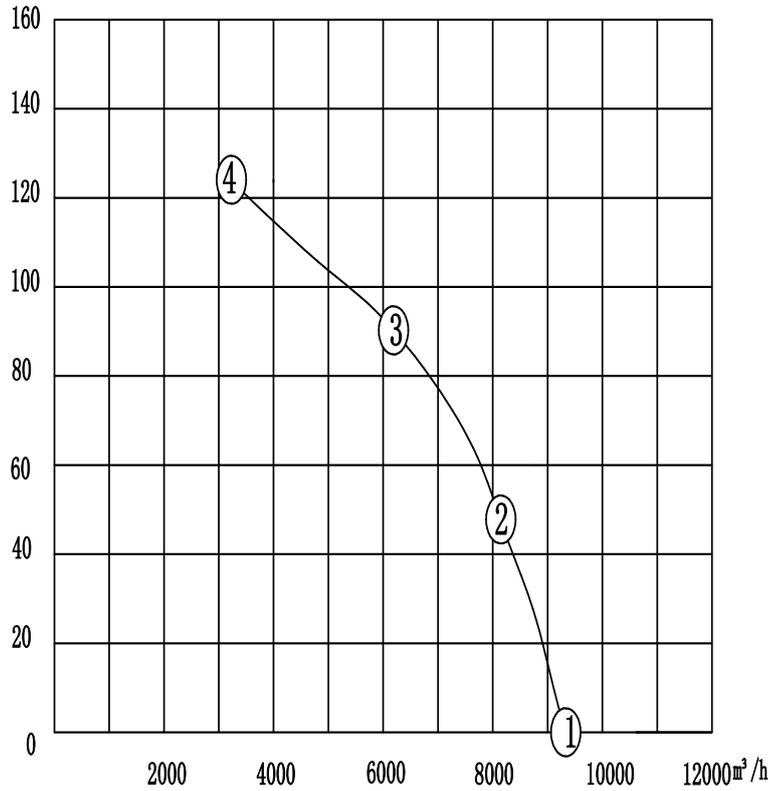

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	1,83	386	946	9333	
2	47	2,04	438	933	7918	
3	91	2,20	479	919	6176	MAX EFF.
4	124	2,41	524	903	3232	IMAX

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


Nominal Data:

U [V]	f [Hz]	C [µF]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _r [°C]	k ₁₀ [m²/s/h]	Noise dB(A)	IP	m [kg]
1~220	50	-	0,48	2,20	919	-40 ... +80	-	71	IP 54	15,3



Type: **ASA 630-6P.G5S-S1**

Part no.:

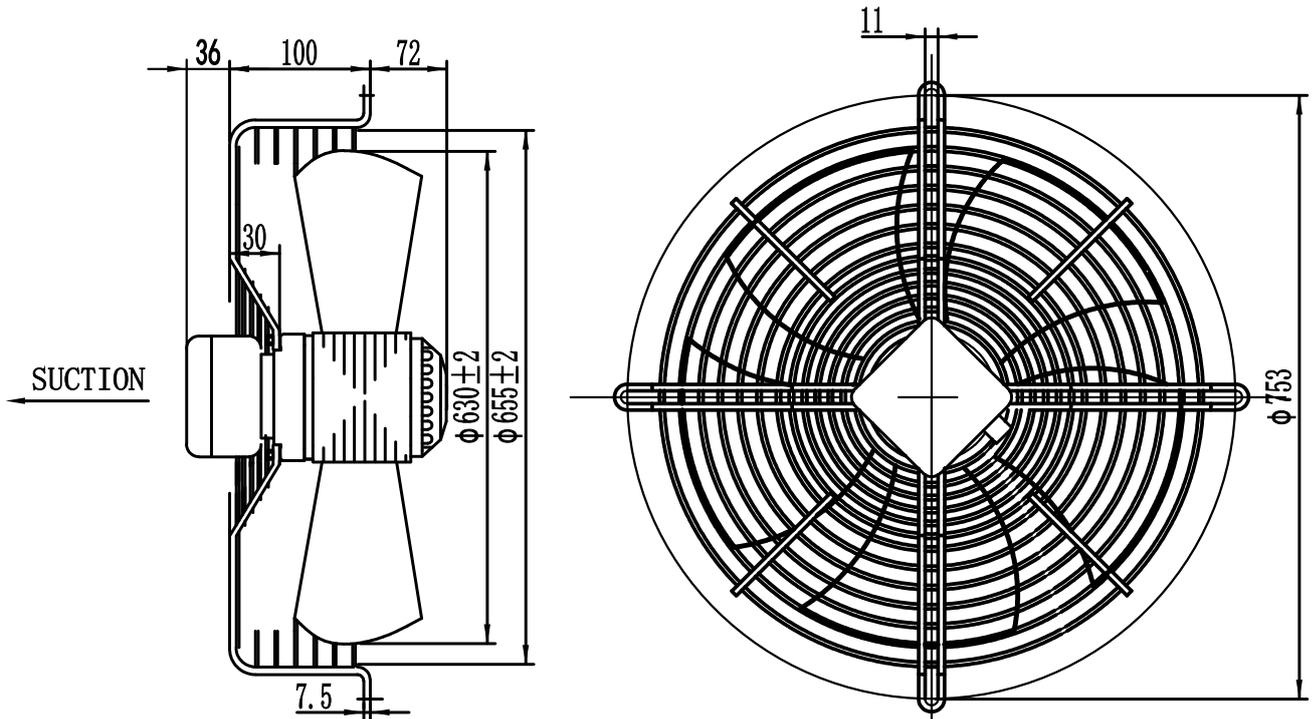




Type: **ASA 630-6P.G5S-S1**

Part no.:



Wirning diagram:

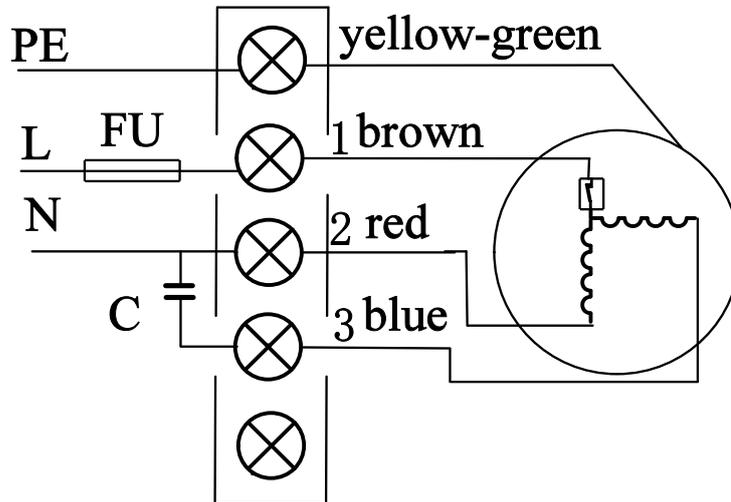

The external wirning diagram:

