




Type: **ATA 450-4M.G5S-S1**

Part no.:



### Curve:

psf (pa)

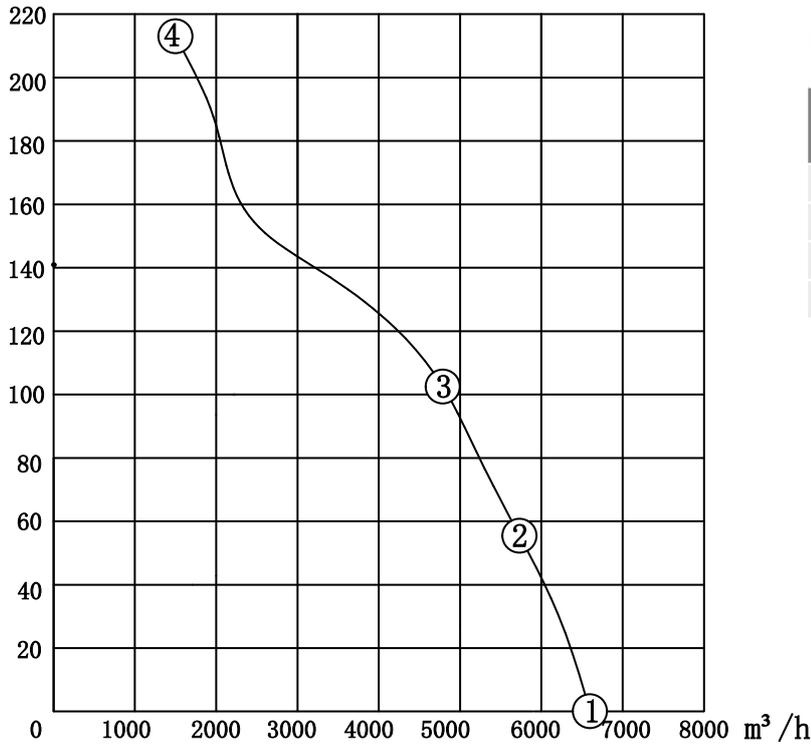

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	1,04	425	1421	6597	
2	57	1,08	463	1412	5749	
3	102	1,13	498	1404	4794	MAX EFF.
4	213	1,29	672	1360	1507	IMAX

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


### Nominal Data:

U [V]	f [Hz]	C [µF]	P <sub>ed</sub> [kW]	I <sub>N</sub> [A]	n <sub>N</sub> [r/min]	t <sub>R</sub> [°C]	k <sub>10</sub> [m²/s/h]	Noise dB(A)	IP	m [kg]
3~380	50	-	0,50	1,13	1404	-40 ... +80	-	73	IP 54	9,3



Type: **ATA 450-4M.G5S-S1**

Part no.:

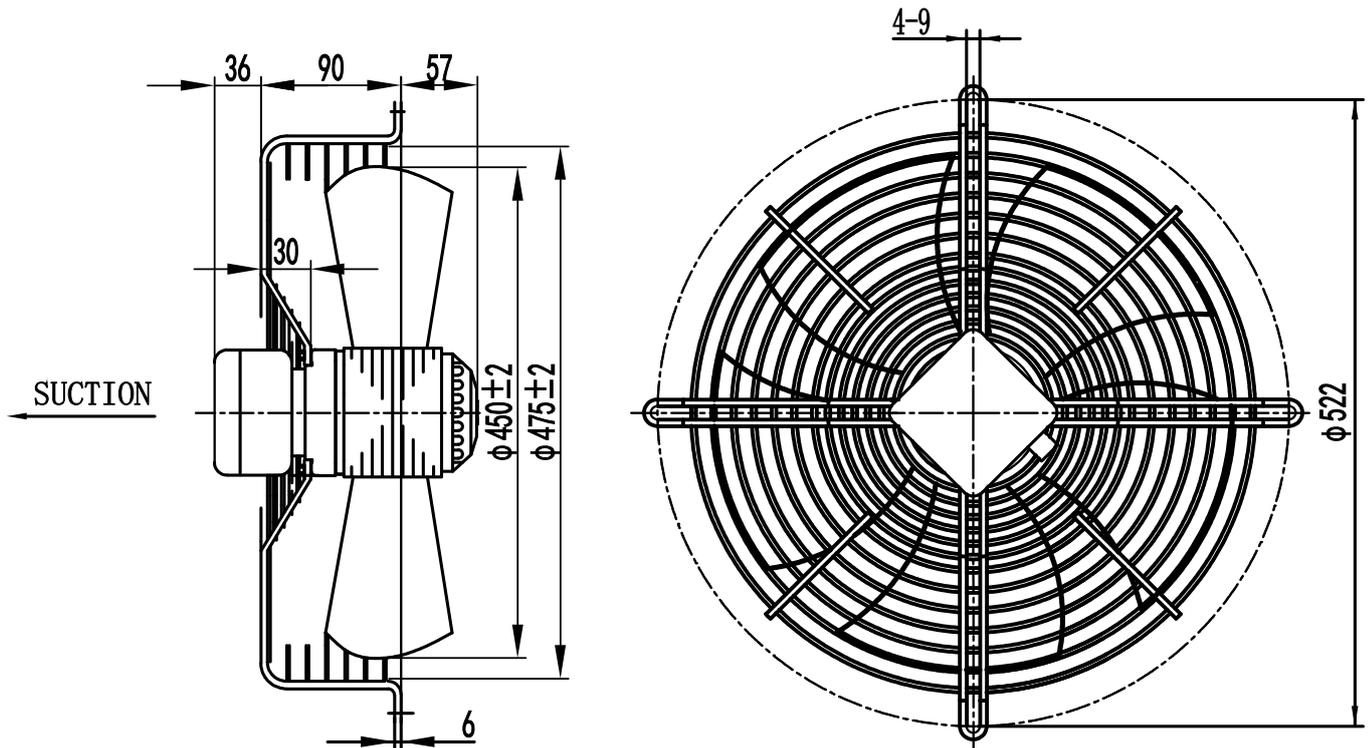




Type: **ATA 450-4M.G5S-S1**

Part no.:



Wirning diagram:

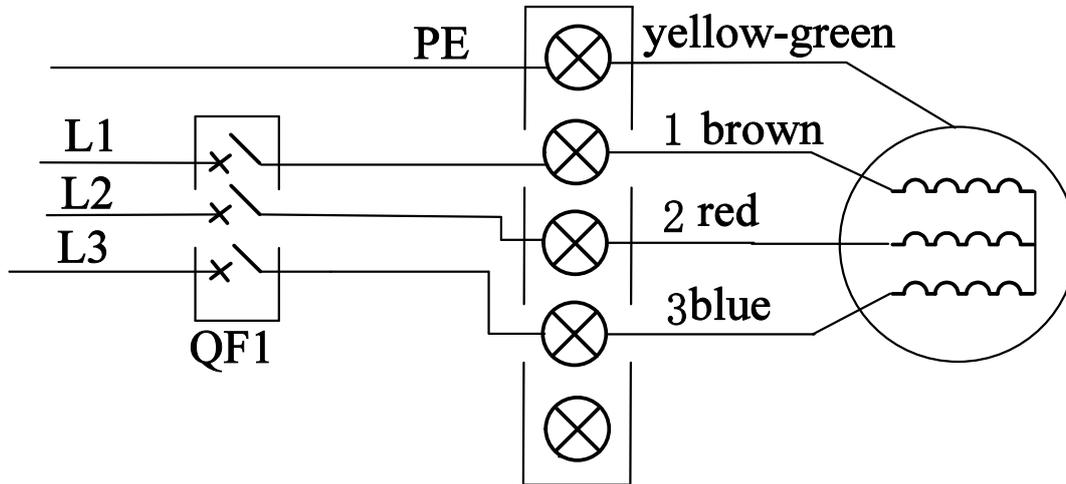

The external wirning diagram:

