




Type: **ATA 500-4K.G5S-S1**

Part no.:



Curve:

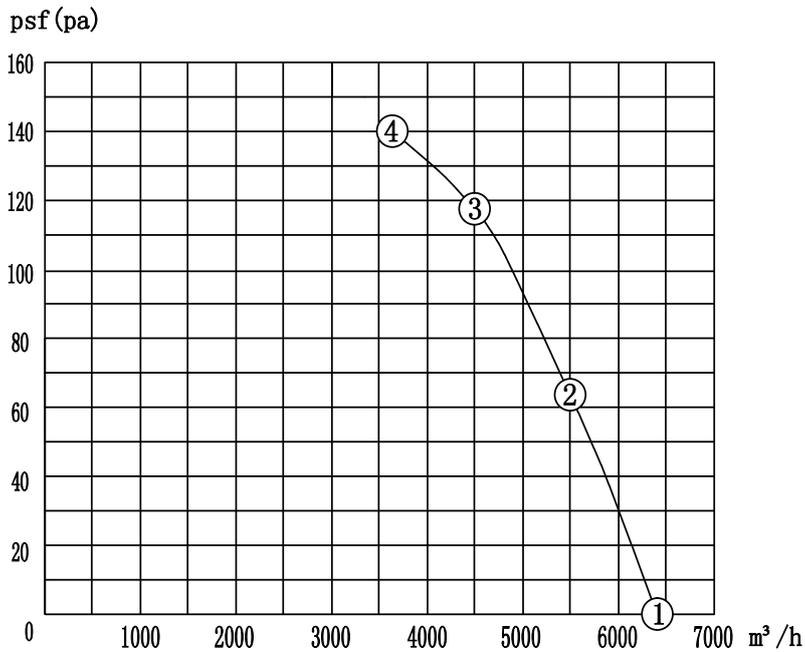

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	0,72	349	1380	6460	
2	64	0,78	405	1356	5635	
3	117	0,85	450	1332	4483	MAX EFF.
4	139	0,83	455	1327	3501	IMAX

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


Nominal Data:

U [V]	f [Hz]	C [µF]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _R [°C]	k ₁₀ [m²/s/h]	Noise dB(A)	IP	m [kg]
3~380	50	-	0,45	0,85	1332	-40 ... +80	-	70	IP 54	9,1



Type: **ATA 500-4K.G5S-S1**

Part no.:

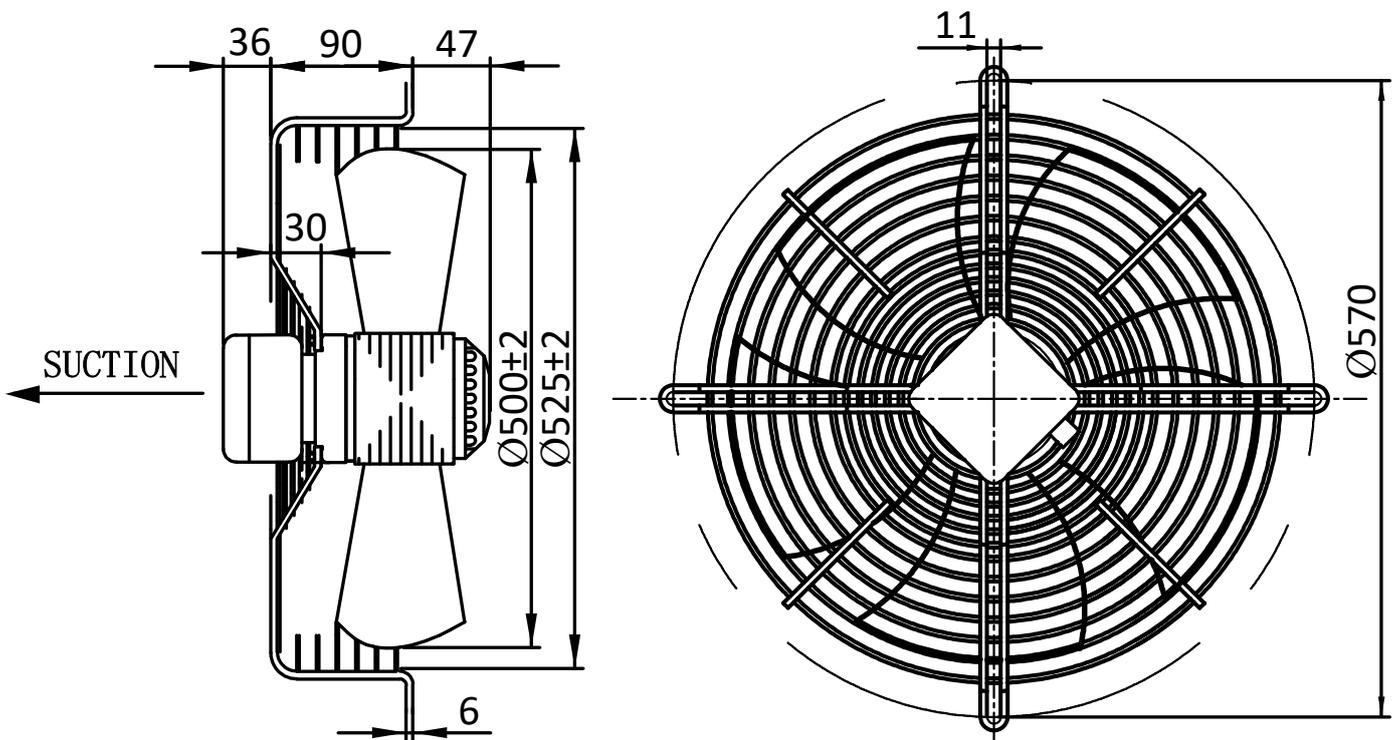




Type: **ATA 500-4K.G5S-S1**

Part no.:



Wirning diagram:

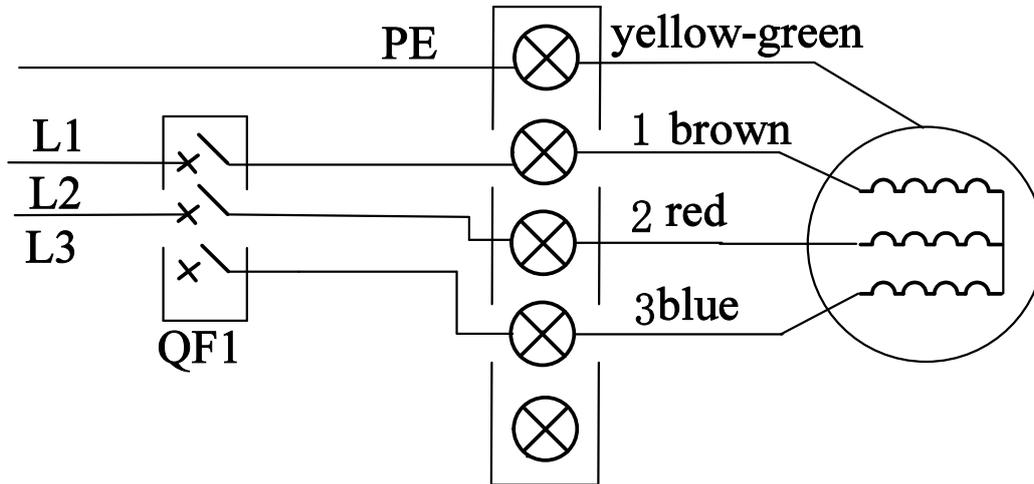

The external wirning diagram:

