




Type: **ATA 500-4M.G5S-S1**

Part no.:



Curve:

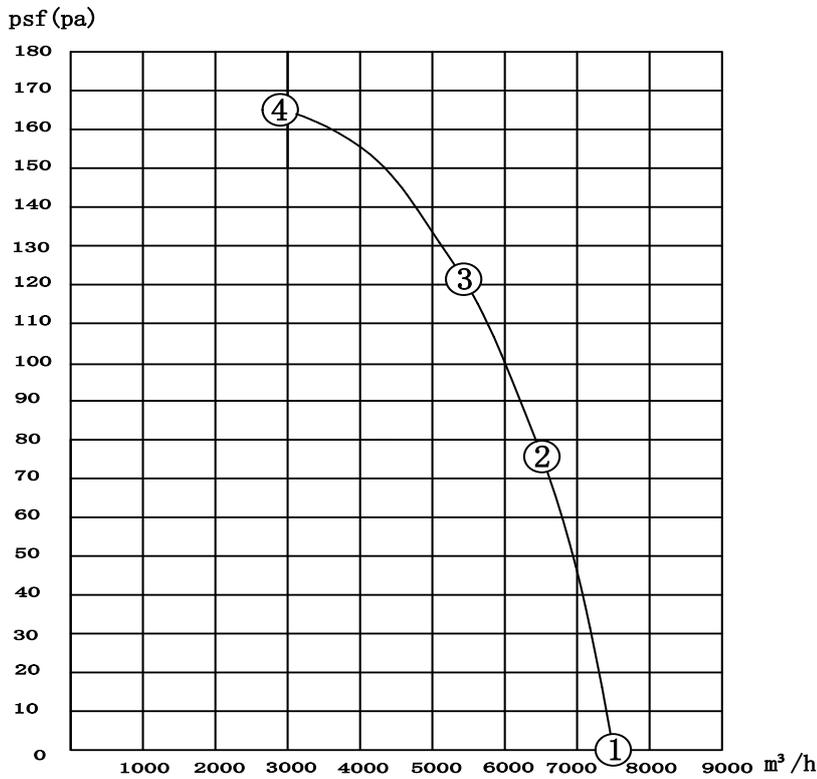

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	0,99	444	1409	7450	
2	75	1,08	517	1392	6357	
3	121	1,15	548	1381	5310	MAX EFF.
4	165	1,15	597	1368	2886	IMAX

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


Nominal Data:

U [V]	f [Hz]	C [µF]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _r [°C]	k ₁₀ [m²/s/h]	Noise dB(A)	IP	m [kg]
3~380	50	-	0,55	1,15	1381	-40 ... +75	-	72	IP 54	10,3



Type: **ATA 500-4M.G5S-S1**

Part no.:

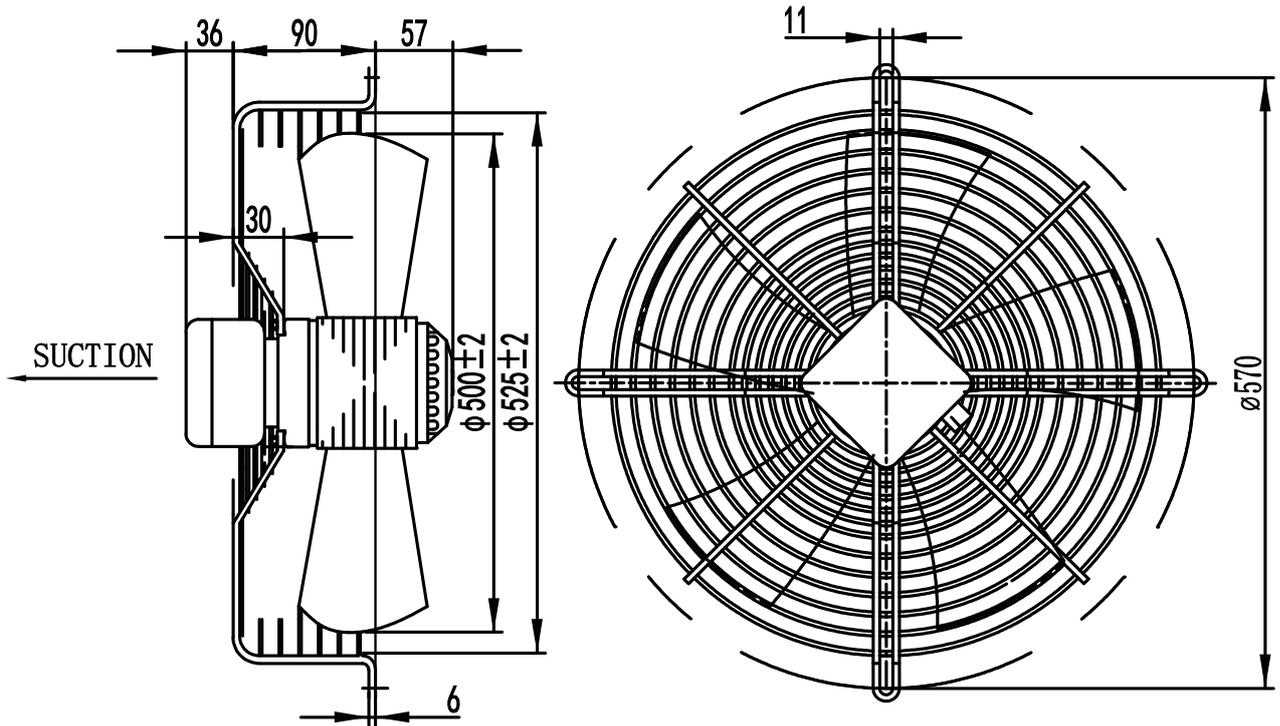




Type: **ATA 500-4M.G5S-S1**

Part no.:



Wirning diagram:

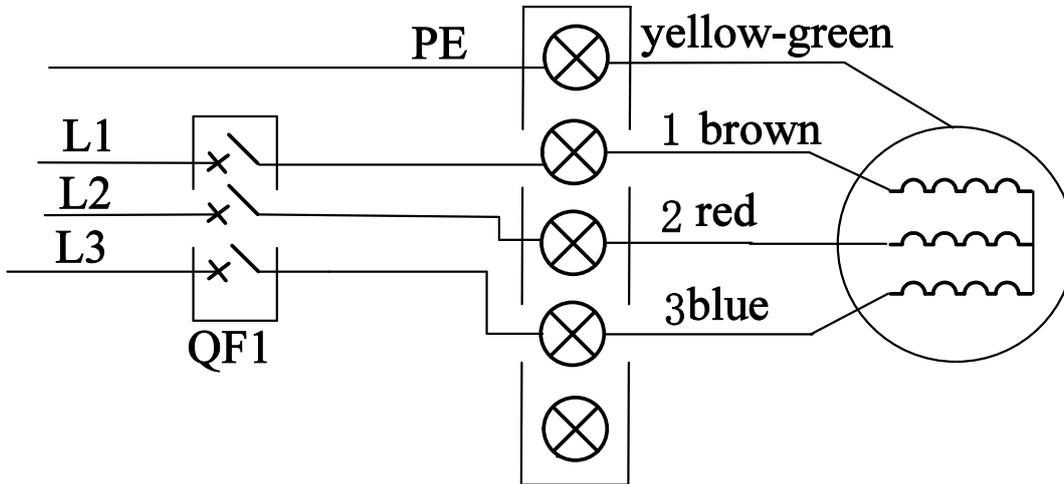

The external wirning diagram:

