




Type: **ATA 500-40.G5S-S1**

Part no.:



Curve:

psf (pa)

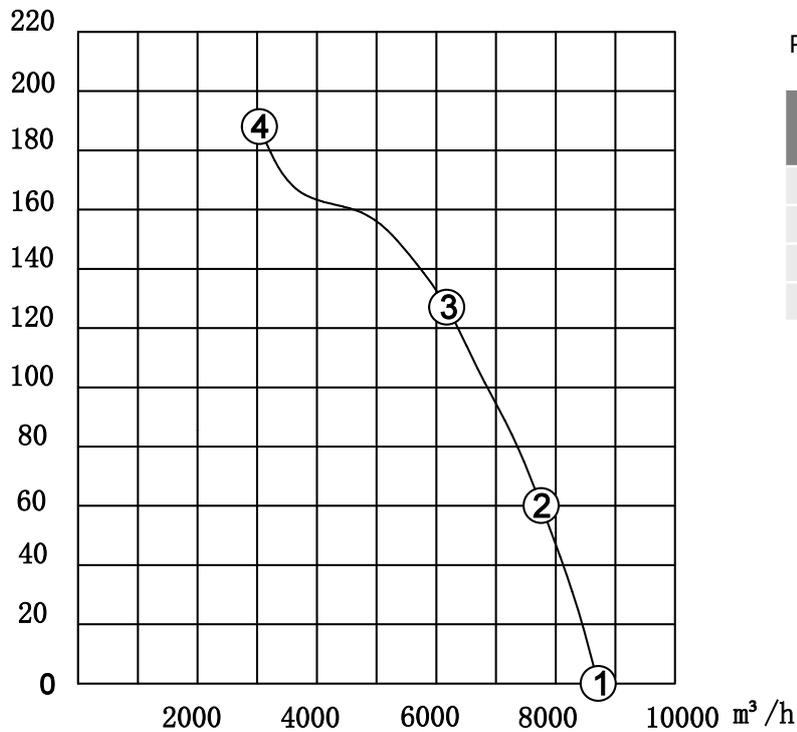

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	1,22	611	1395	8718	
2	60	1,29	670	1383	7765	
3	127	1,58	733	1369	6178	MAX EFF.
4	188	1,67	803	1354	3045	IMAX

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


Nominal Data:

U [V]	f [Hz]	C [µF]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _r [°C]	k ₁₀ [m²/s/h]	Noise dB(A)	IP	m [kg]
3~380	50	-	0,73	1,58	1369	-40 ... +70	-	73	IP 54	11,4



Type: **ATA 500-40.G5S-S1**

Part no.:

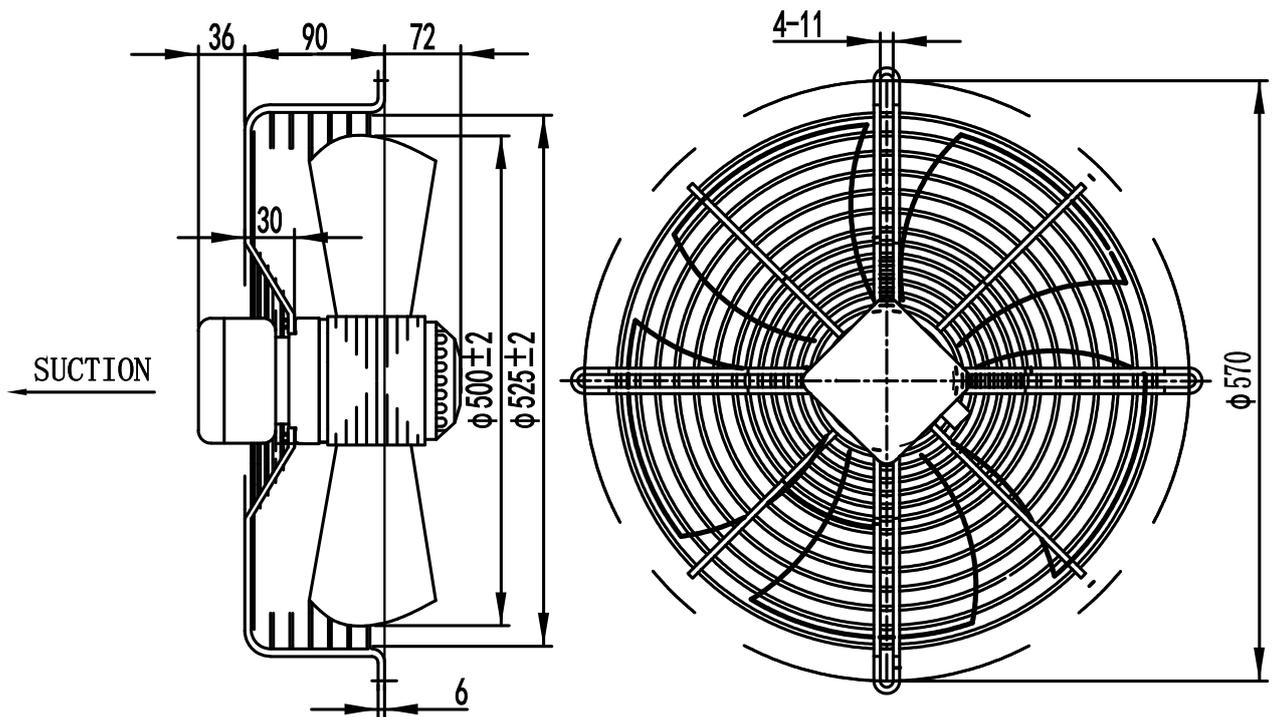




Type: **ATA 500-40.G5S-S1**

Part no.:



Wirning diagram:

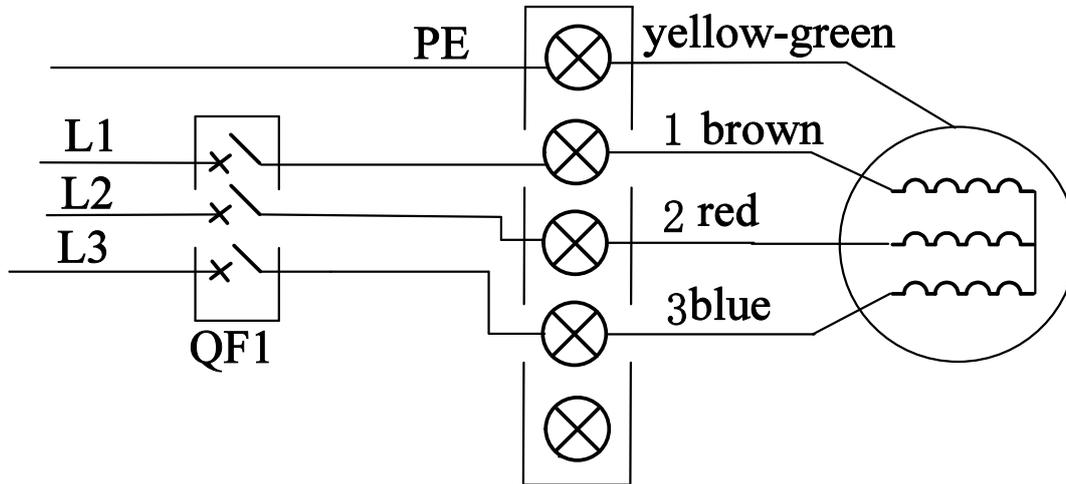

The external wirning diagram:

