




Type: **ATA 500-4P.G5S-S1**

Part no.:



Curve:

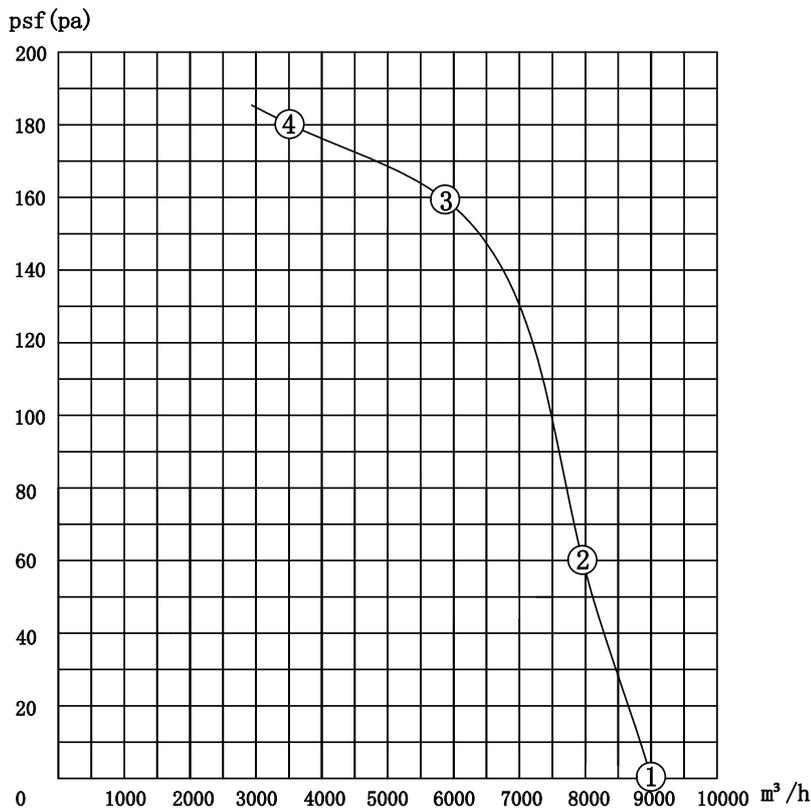

Performance parameters at key point:

| | psf | I | P1 | n | Q | Note |
|---|-----|------|-----|---------|--------|----------|
| | [a] | [A] | [W] | [r/min] | [m³/h] | |
| 1 | 0 | 1,61 | 692 | 1416 | 8955 | |
| 2 | 61 | 1,66 | 758 | 1410 | 7992 | |
| 3 | 141 | 1,73 | 810 | 1396 | 5799 | MAX EFF. |
| 4 | 180 | 1,79 | 880 | 1388 | 3580 | IMAX |

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


Nominal Data:

| U [V] | f [Hz] | C [µF] | P _{ed} [kW] | I _N [A] | n _N [r/min] | t _r [°C] | k ₁₀ [m²/s/h] | Noise dB(A) | IP | m [kg] |
|-------|--------|--------|----------------------|--------------------|------------------------|---------------------|--------------------------|-------------|-------|--------|
| 3~380 | 50 | - | 0,81 | 1,73 | 1396 | -40 ... +70 | - | 74 | IP 54 | 12,2 |



Type: **ATA 500-4P.G5S-S1**

Part no.:

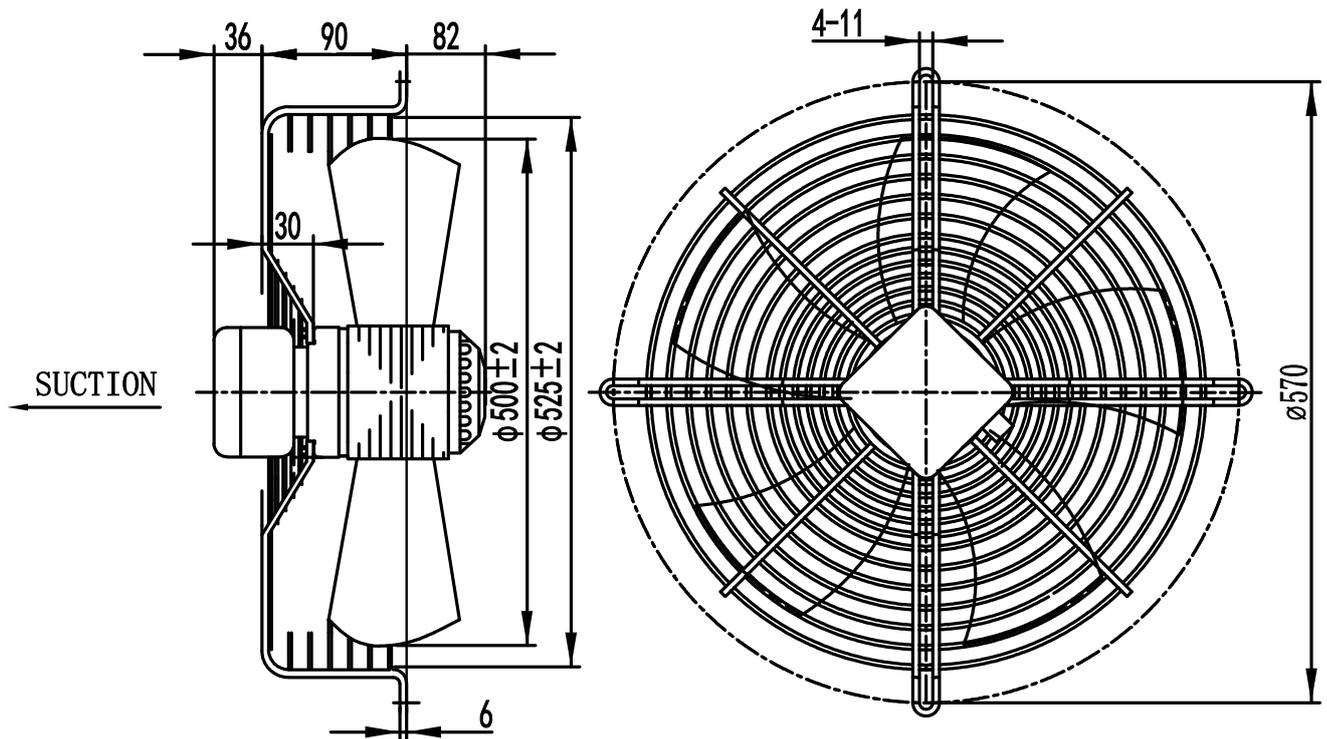




Type: **ATA 500-4P.G5S-S1**

Part no.:



Wirning diagram:

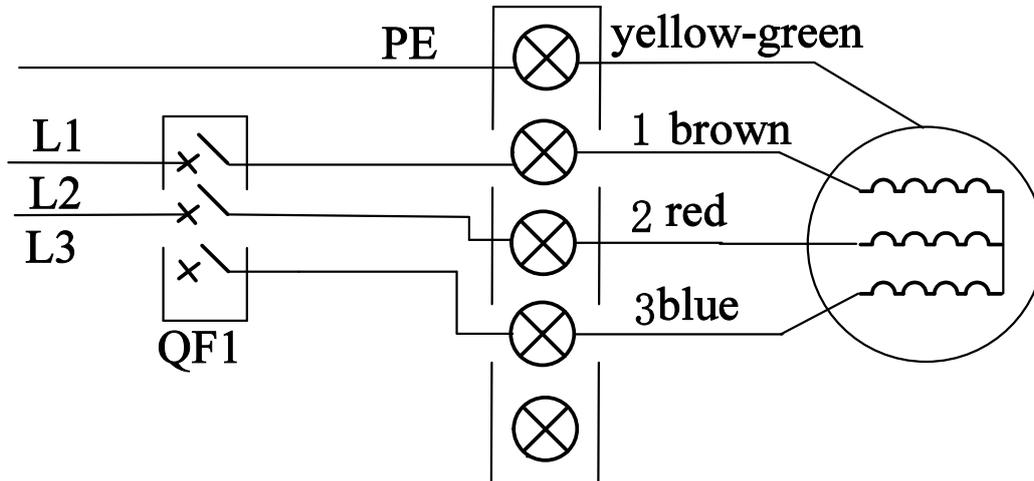

The external wirning diagram:

