




Type: **ATA 630-4P.G5S-S1**

Part no.:



Curve:

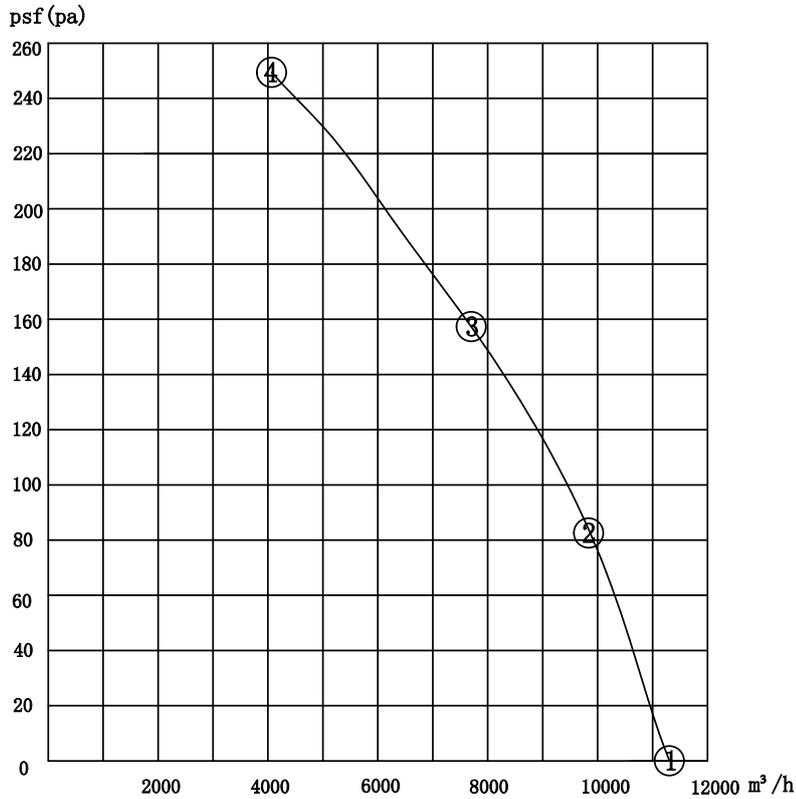

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	1,48	705	1414	11304	
2	83	1,63	834	1395	9891	
3	155	1,77	938	1378	7804	MAX EFF.
4	249	1,98	1120	1346	4069	IMAX

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


Nominal Data:

U [V]	f [Hz]	C [µF]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _r [°C]	k ₁₀ [m²/s/h]	Noise dB(A)	IP	m [kg]
3~380	50	-	0,94	1,77	1378	-40 ... +70	-	77	IP 54	15,3



Type: **ATA 630-4P.G5S-S1**

Part no.:

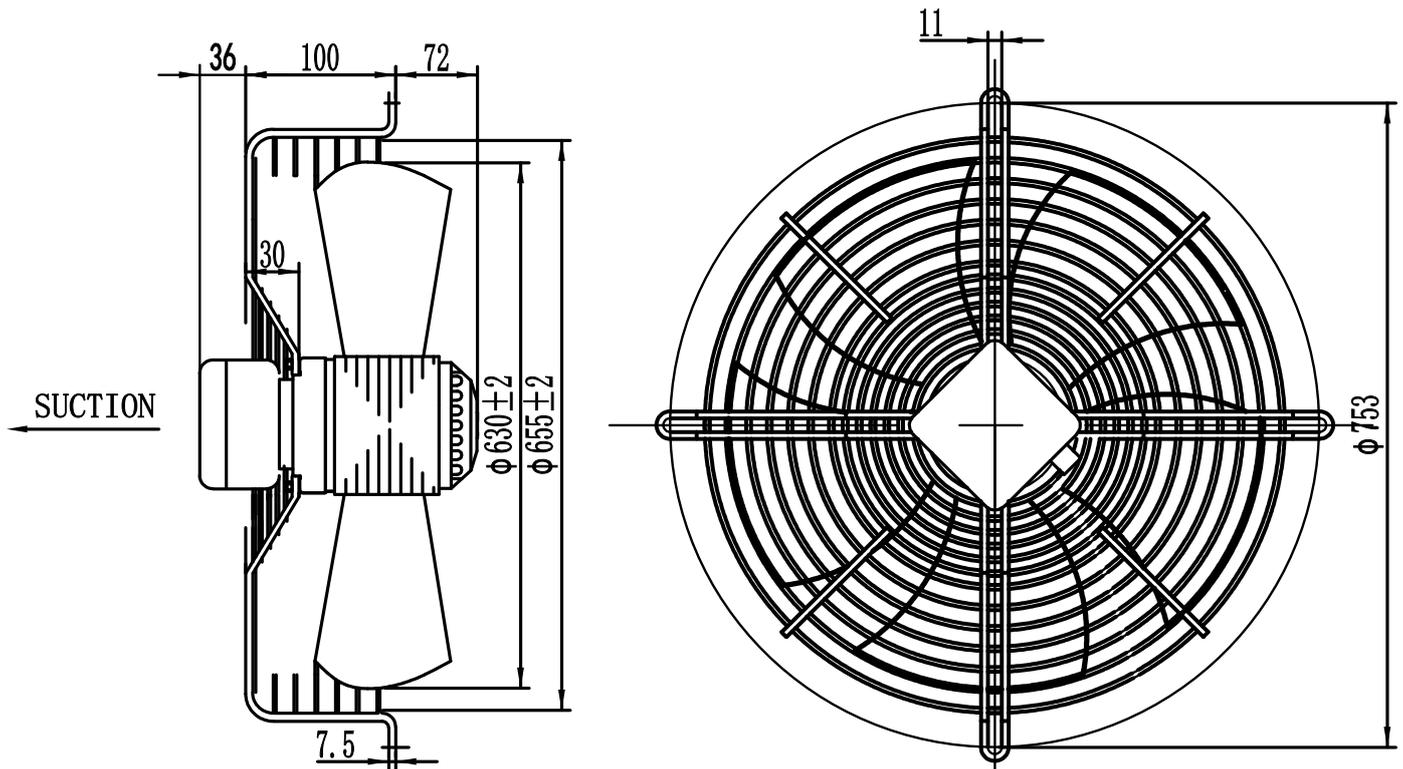




Type: **ATA 630-4P.G5S-S1**

Part no.:



Wirining diagram:

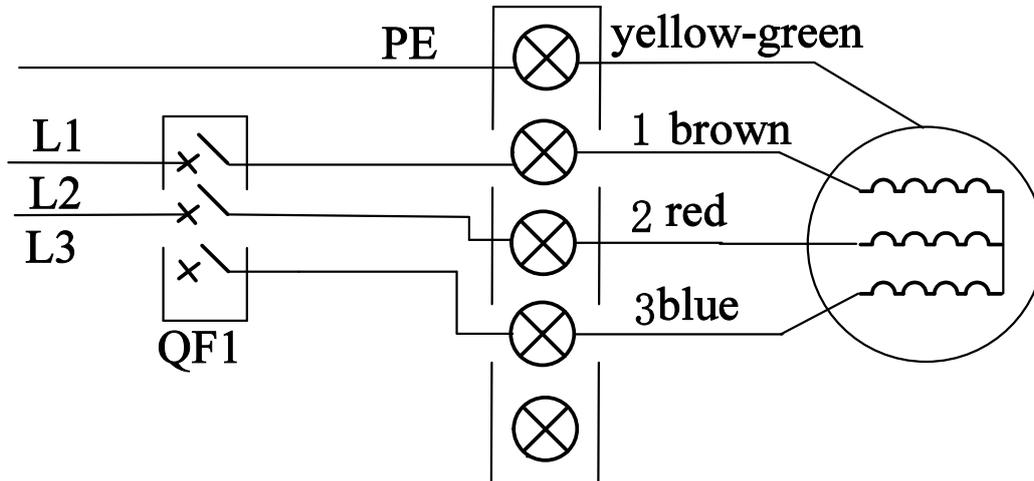

The external wirining diagram:

