




Type: **ATA 630-4Q.G5S-S1**

Part no.:



Curve:

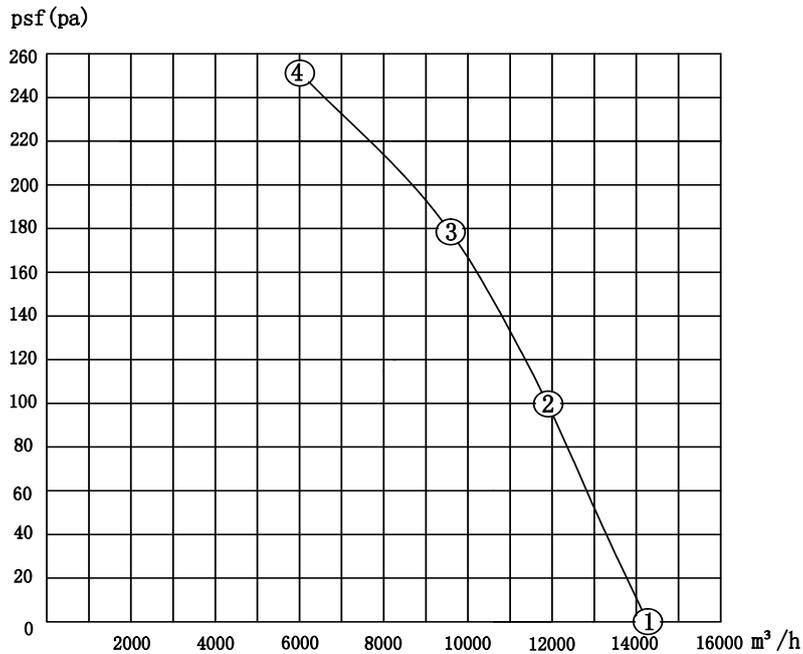

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	2,25	1118	1401	14625	
2	100	2,50	1325	1382	12270	
3	177	2,68	1440	1369	9897	MAX EFF.
4	249	2,84	1585	1354	6115	IMAX

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


Nominal Data:

U [V]	f [Hz]	C [µF]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _R [°C]	k ₁₀ [m²s/h]	Noise dB(A)	IP	m [kg]
3~380	50	-	1,44	2,68	1369	-40 ... +55	-	78	IP 54	17,0



Type: **ATA 630-4Q.G5S-S1**

Part no.:

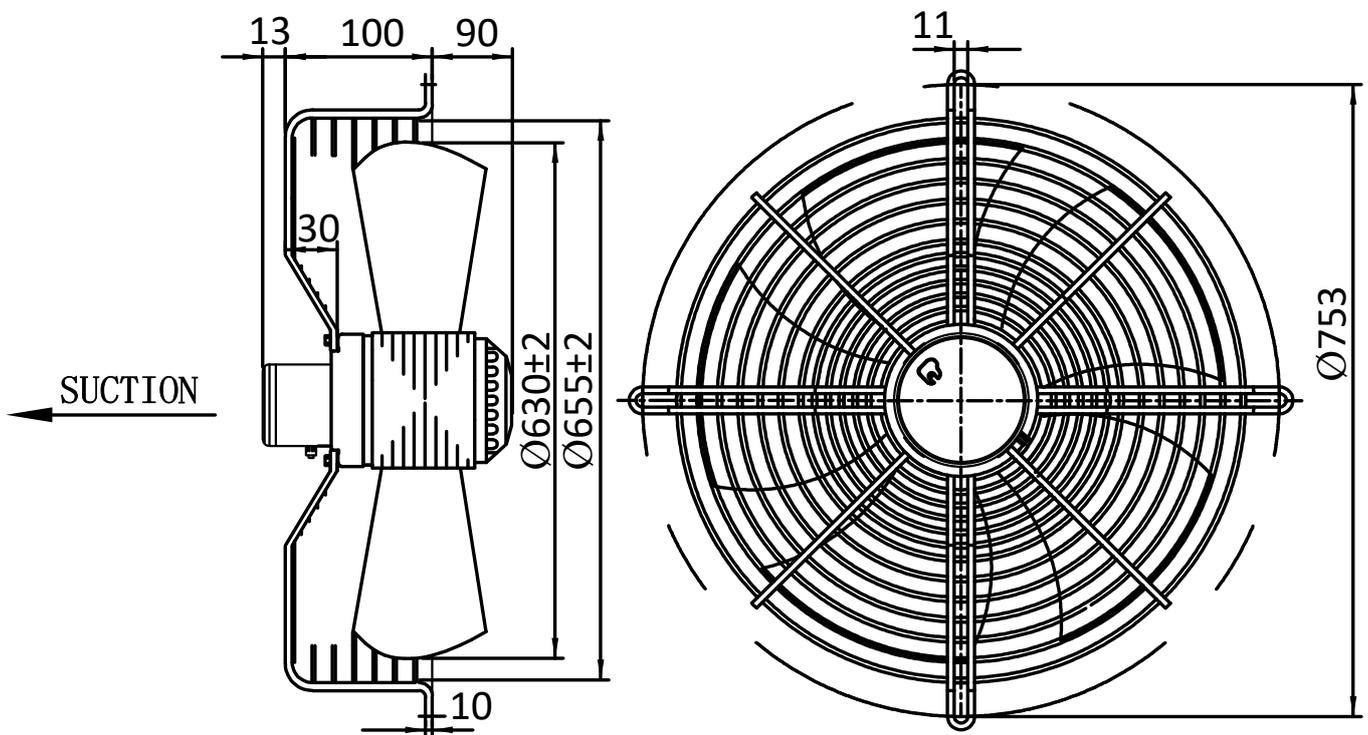




Type: **ATA 630-4Q.G5S-S1**

Part no.:



Wirining diagram:

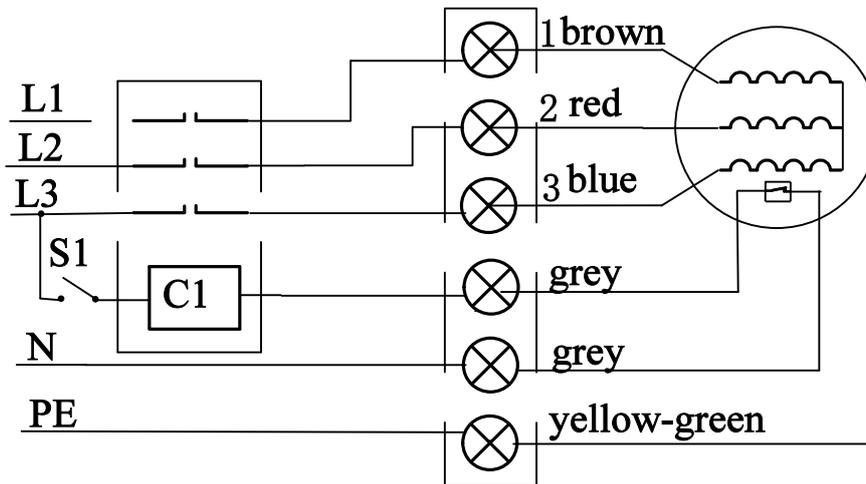

C1 - run control contactor, S1 - connected, fan operation.

The external wirining diagram:

