




Type: **ATA 630-4R.G5S-S1**

Part no.:



Curve:

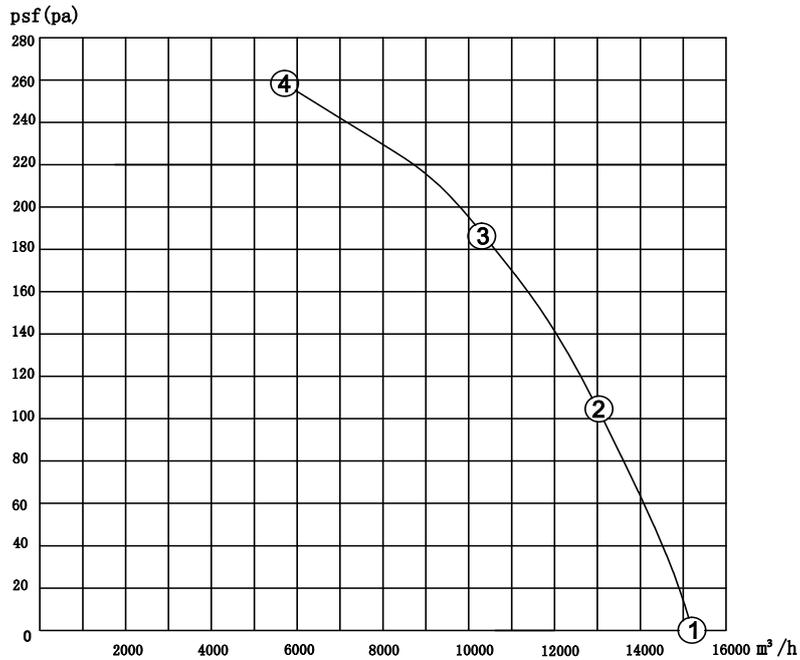

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	2,99	1320	1420	15151	
2	104	3,17	1499	1405	12866	
3	188	3,31	1650	1392	10334	MAX EFF.
4	258	3,48	1794	1380	5709	IMAX

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


Nominal Data:

U [V]	f [Hz]	C [µF]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _R [°C]	k ₁₀ [m²s/h]	Noise dB(A)	IP	m [kg]
3~380	50	-	1,65	3,31	1392	-40 ... +60	-	80	IP 54	17,0



Type: **ATA 630-4R.G5S-S1**

Part no.:

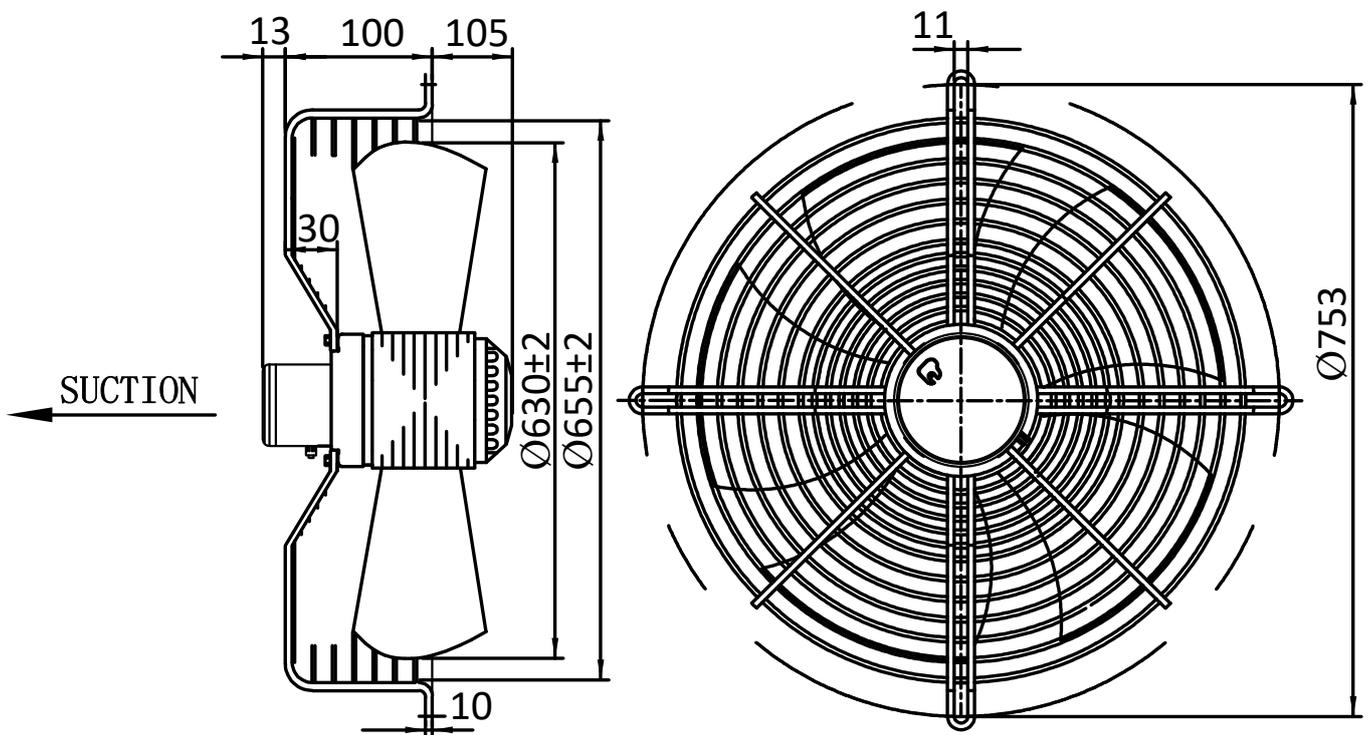




Type: **ATA 630-4R.G5S-S1**

Part no.:



Wirning diagram:

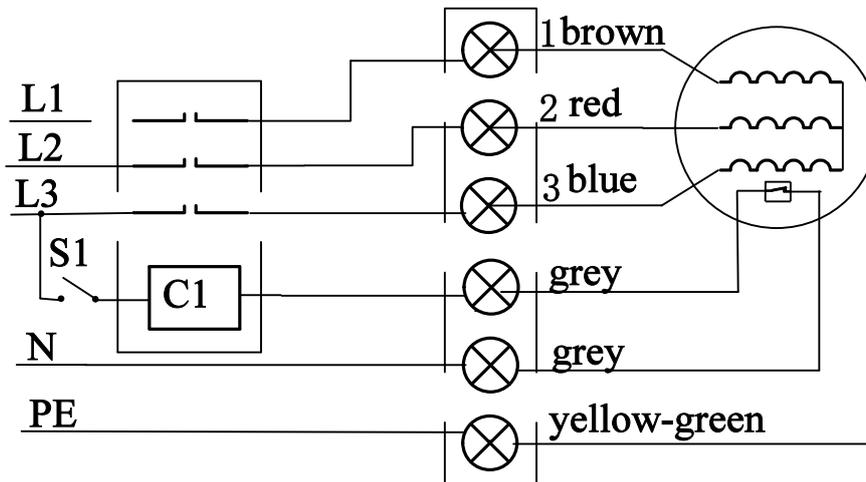

C1 - run control contactor, S1 - connected, fan operation.

The external wirning diagram:

