




Type: **ATA 630-4S.G7S-S1**

Part no.:



Curve:

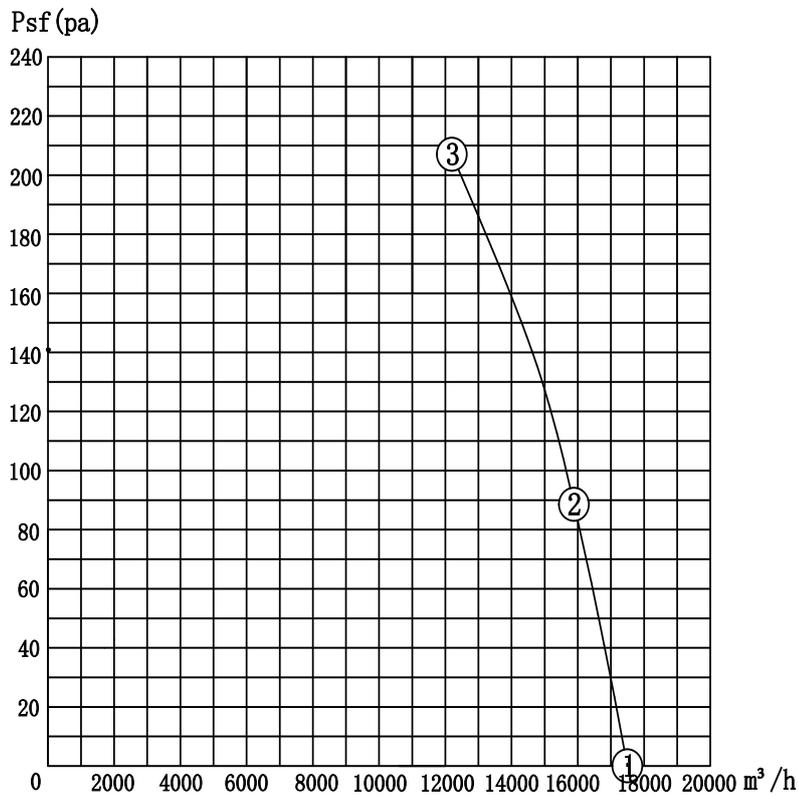

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	3,97	1868	1421	17512	
2	88	4,19	2080	1410	15876	
3	207	4,45	2331	1395	12233	MAX EFF.

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


Nominal Data:

U [V]	f [Hz]	C [µF]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _r [°C]	k ₁₀ [m²/s/h]	Noise dB(A)	IP	m [kg]
3~380	50	-	2,33	4,45	1395	-40 ... +50	-	81	IP 54	25



Type: **ATA 630-4S.G7S-S1**

Part no.:

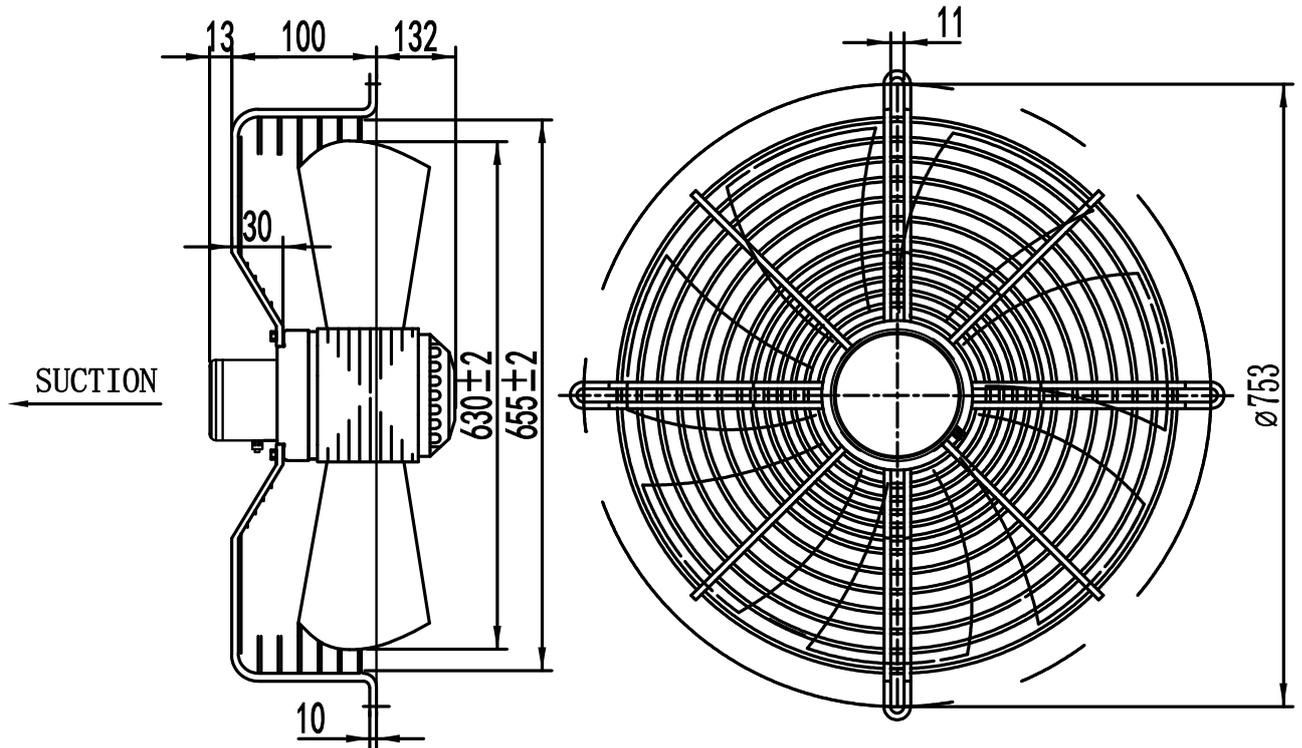




Type: **ATA 630-4S.G7S-S1**

Part no.:



Wirining diagram:

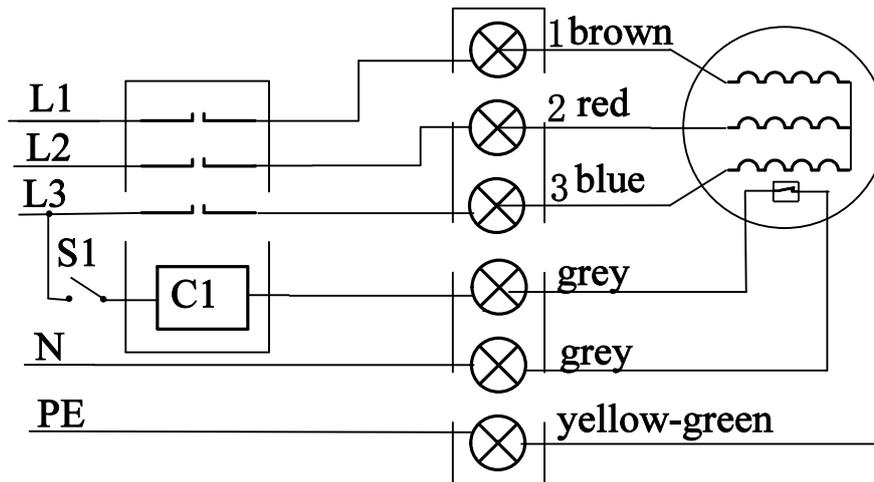

C1 - run control contactor, S1 -connected, fan operation.

The external wirining diagram:

