




Type: **ATA 630-6P.G5S-S1**

Part no.:



**Curve:**  
psf (pa)

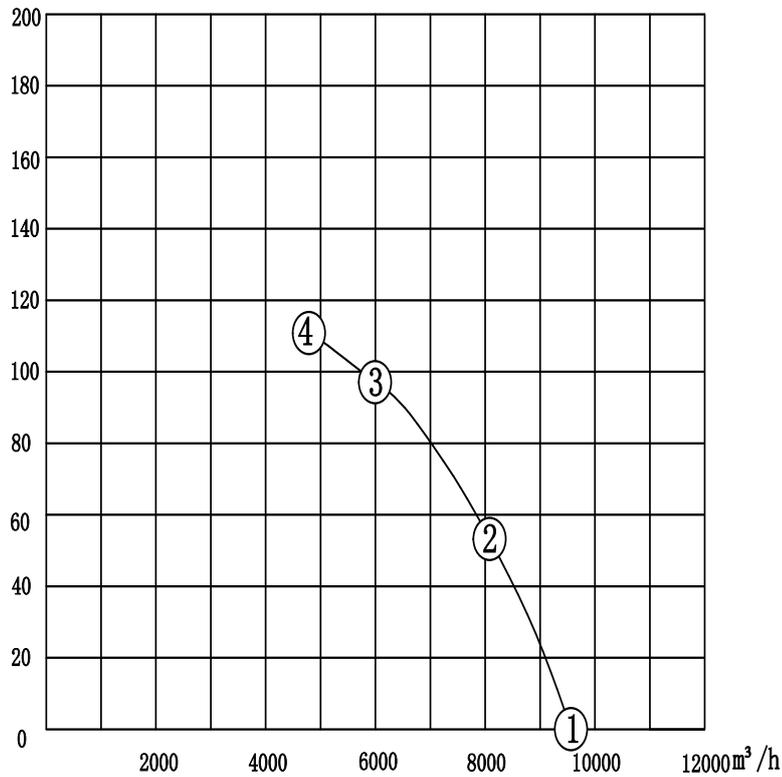

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	1,16	373	947	9510	
2	54	1,20	436	936	8007	
3	97	1,21	489	925	6047	MAX EFF.
4	112	1,25	509	920	4777	IMAX

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


### Nominal Data:

U [V]	f [Hz]	C [µF]	P <sub>ed</sub> [kW]	I <sub>N</sub> [A]	n <sub>N</sub> [r/min]	t <sub>R</sub> [°C]	k <sub>10</sub> [m²/s/h]	Noise dB(A)	IP	m [kg]
3~380	50	-	0,49	1,21	925	-40 ... +85	-	71	IP 54	15,3



Type: **ATA 630-6P.G5S-S1**

Part no.:

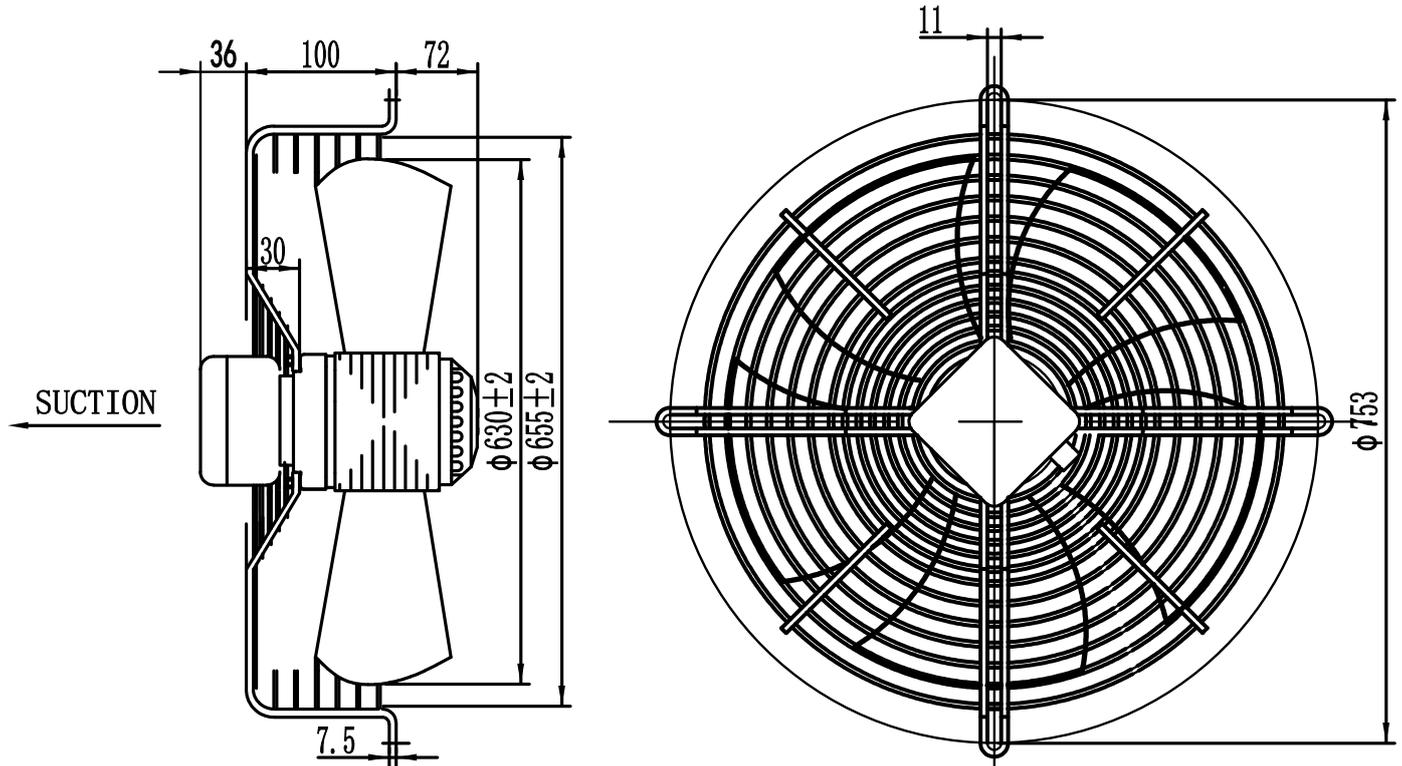




Type: **ATA 630-6P.G5S-S1**

Part no.:



Wirining diagram:

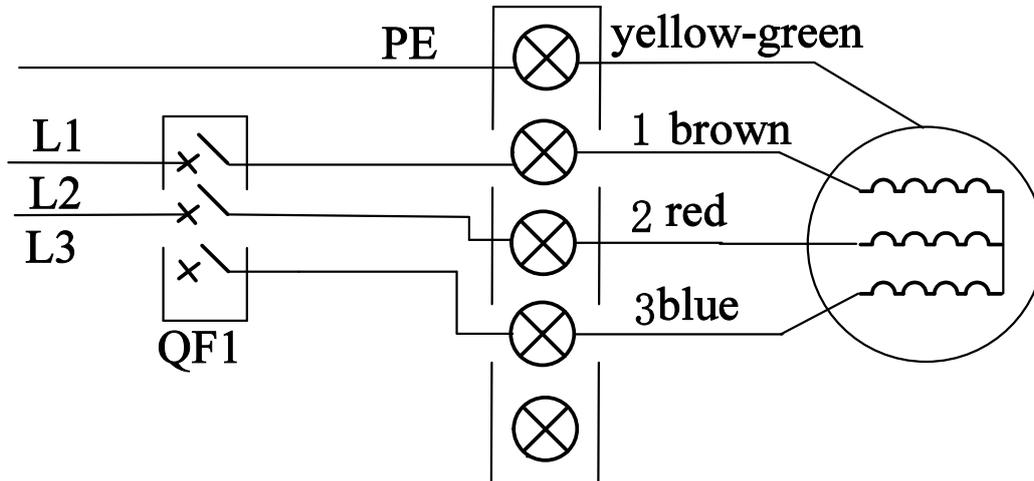

The external wirining diagram:

