




Type: **ATA 800-6U.P5H-S1**

Part no.:



Curve:

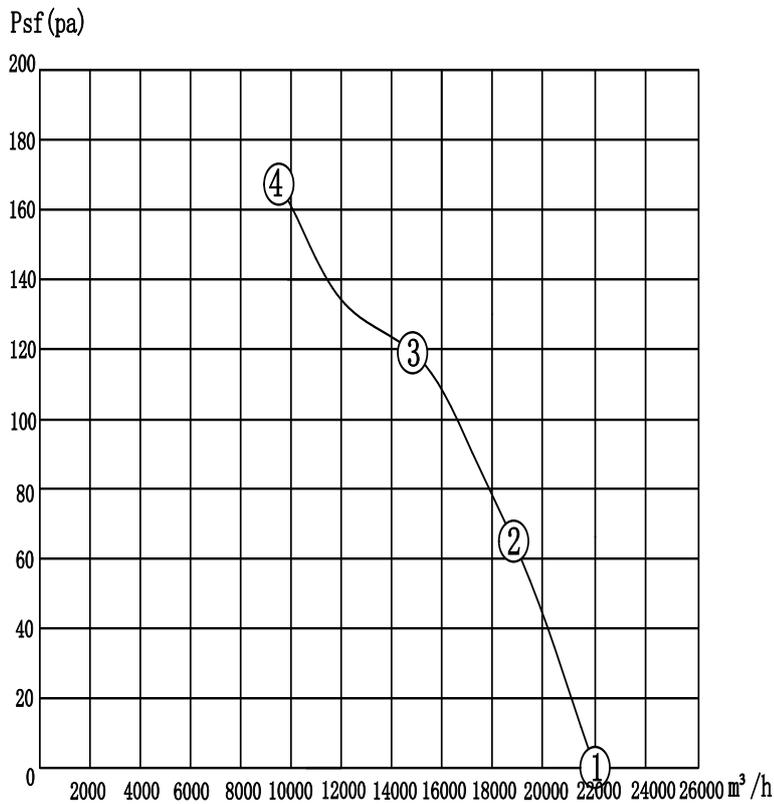

Performance parameters at key point:

	psf	I	P1	n	Q	Note
	[a]	[A]	[W]	[r/min]	[m³/h]	
1	0	3,88	1598	940	22119	
2	65	4,05	1768	932	18796	
3	119	4,20	1923	925	14901	MAX EFF.
3	167	4,34	2033	919	9525	IMAX

PS: Fan working performance tested with wall plate and under standart atmospheric pressure at 20°C.


Nominal Data:

U [V]	f [Hz]	C [µF]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _r [°C]	k ₁₀ [m²/s/h]	Noise dB(A)	IP	m [kg]
3~380	50	-	1,92	4,20	925	-40 ... +65	-	76	IP 54	43



Type: **ATA 800-6U.P5H-S1**

Part no.:

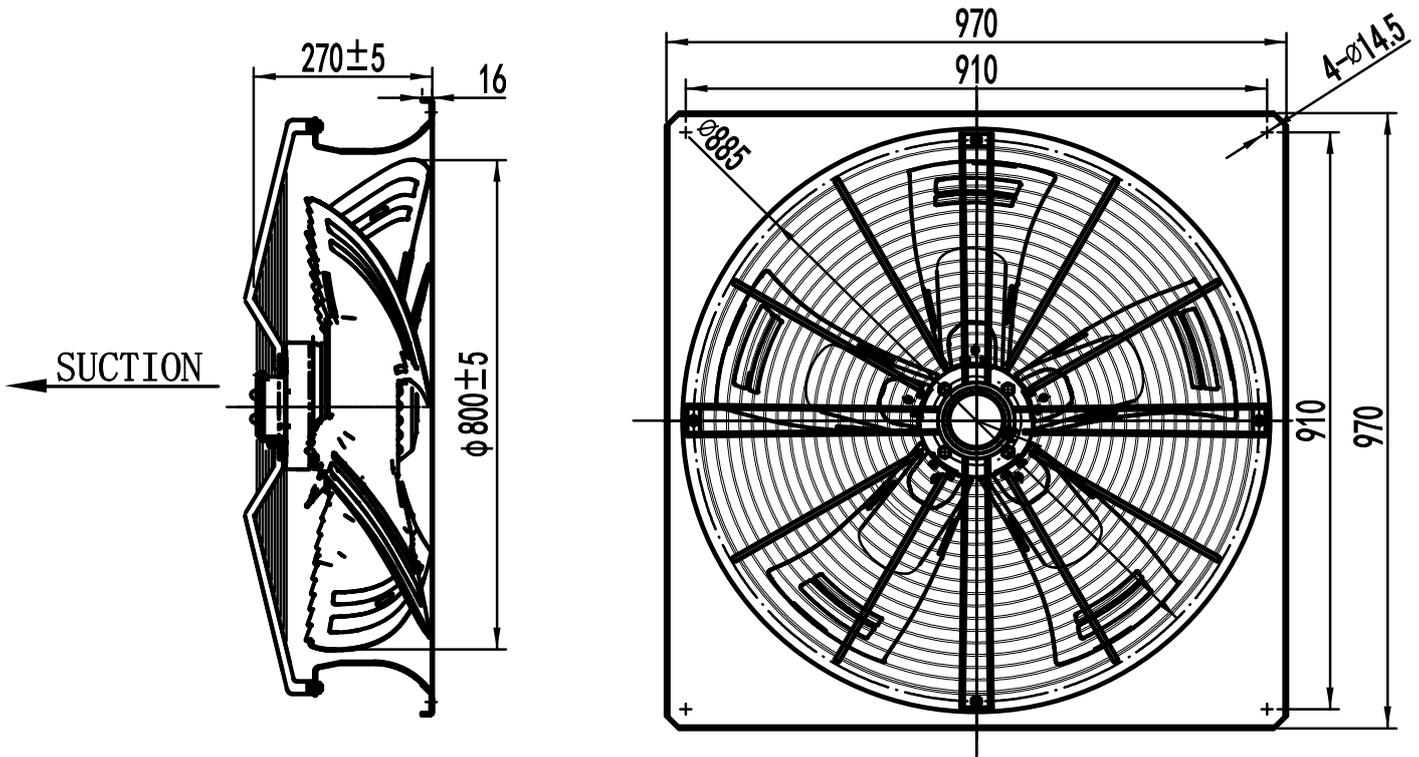




Type: **ATA 800-6U.P5H-S1**

Part no.:



Wirning diagram:

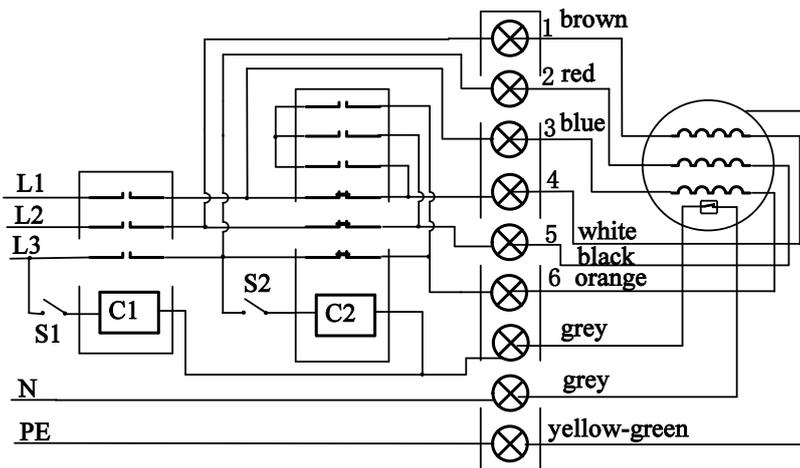

C1 - run control air switch, S1 - switched on, the fan running. C2 - Y/Δ operation control contactor, S2 - disconnect, Δ - connection; S2 - connected, Y - connection.

The external wirning diagram:

