

500 mm Ø

4 POLES/POLOS



Characteristics / Características

4-500/25 1~ 230V 50Hz CAP = 12 uF Is/In = 2,9

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRB/4-500/25	1	230	L	1,86	425	1400	74	
	1	230	M	2,30	530	1350	73	
	1	230	H	2,67	620	1290	75	70

4-500/30 1~ 230V 50Hz CAP = 16 uF Is/In = 2,8


Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRB/4-500/30	2	230	L	2,48	570	1395	76	
	2	230	M	2,90	700	1350	78	
	2	230	H	3,36	805	1310	82	70

4-500/35 1~ 230V 50Hz CAP = 15 uF Is/In = 2,6



Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRB/4-500/35	3	230	L	3,25	770	1400	77	
	3	230	M	3,70	900	1380	78	
	3	230	H	4,16	995	1355	81	70

Dimensions and Construction Dimensiones y Construcción

Airflow
B ←

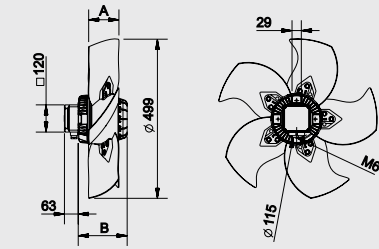


S

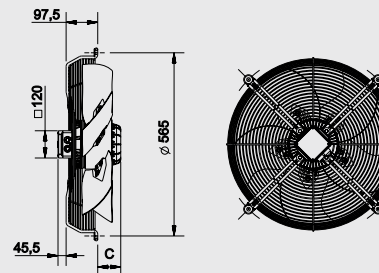


PN



Type / Tipo	A	B	C
25°	76	139	59
30°	85	151	71
35°	95	151	71

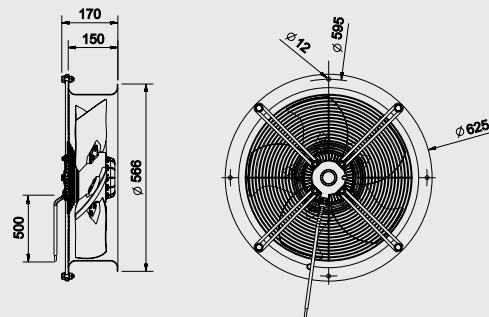

Q

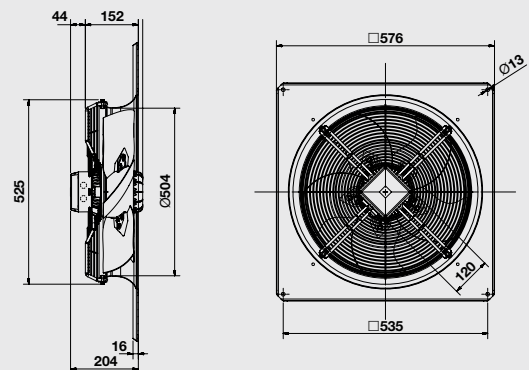

Z



Weight/Peso (Kg)

Type / Tipo	S	PN	Q	Z
HRB/4-500/25	10	13	17	20
HRB/4-500/30	12	15	19	22
HRB/4-500/35	12	15	19	22