

450 mm Ø

8 POLES/POLOS



Characteristics / Características

8-450/25 1~ 230V 50Hz

CAP = 8 uF

Is/In = 2,8

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRB/8-450/25	1	230	L	0,65	115	715	56	
	1	230	M	0,69	125	705	54	
	1	230	H	0,70	135	690	53	70

8-450/30 1~ 230V 50Hz

CAP = 8 uF

Is/In = 2,7

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRB/8-450/30	2	230	L	0,70	120	710	56	
	2	230	M	0,74	130	700	57	
	2	230	H	0,79	140	685	60	70

8-450/35 1~ 230V 50Hz


CAP = 8 uF

Is/In = 2,5



Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRB/8-450/35	3	230	L	0,73	122	705	58	
	3	230	M	0,77	133	695	58	
	3	230	H	0,88	144	680	61	70

Dimensions and Construction Dimensiones y Construcción

Airflow
B ←

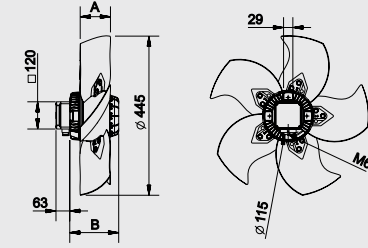


S

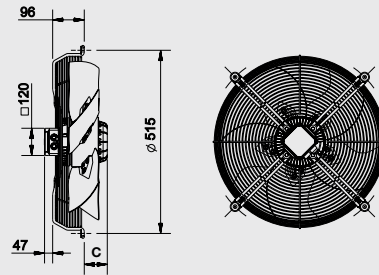


PN



Type / Tipo	A	B	C
25°	72	124	44
30°	83,5	124	44
35°	95	125	45

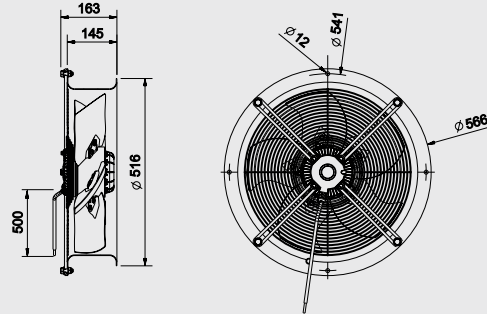

Q

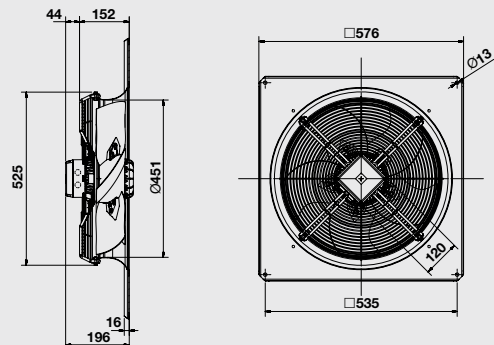

Z



Weight/Peso (Kg)

Type / Tipo	S	PN	Q	Z
HRB/8-450/25	8	10	14	16
HRB/8-450/30	8	10	14	16
HRB/8-450/35	9	11	15	17