

500 mm Ø

8 POLES/POLOS



Characteristics / Características

8-500/25 1~ 230V 50Hz

CAP = 8 uF

Is/In = 2,9

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRB/8-500/25	1	230	L	0,71	120	705	58	
	1	230	M	0,75	130	690	58	
	1	230	H	0,77	150	670	59	70

8-500/30 1~ 230V 50Hz

CAP = 8 uF

Is/In = 2,9

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRB/8-500/30	2	230	L	0,77	130	690	59	
	2	230	M	0,81	145	675	60	
	2	230	H	0,85	160	655	62	70

8-500/35 1~ 230V 50Hz


CAP = 8 uF

Is/In = 2,8



Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRB/8-500/35	3	230	L	0,83	140	660	61	
	3	230	M	0,84	150	644	61	
	3	230	H	0,87	165	638	63	70

Dimensions and Construction Dimensiones y Construcción

Airflow
B ←

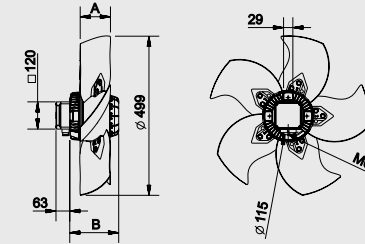


S

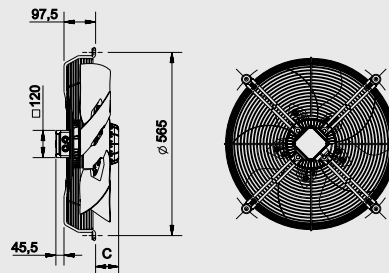


PN



Type / Tipo	A	B	C
25°	76	124	44
30°	85	124	44
35°	95	125	45

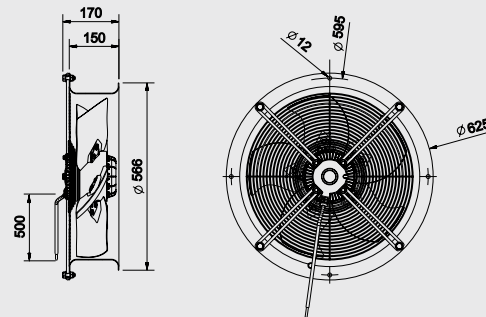

Q

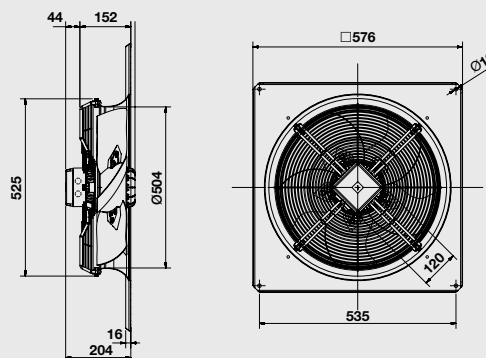

Z



Weight/Peso (Kg)

Type / Tipo	S	PN	Q	Z
HRB/8-500/25	10	13	17	20
HRB/8-500/30	12	15	19	22
HRB/8-500/35	12	15	19	22