

800 mm Ø

12 POLES/POLOS



Characteristics / Características

12-800/28 3~ 400V 50Hz

Is/In= 2,4

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRST/12-800/28	1	400Δ	L	0,75	245	453	67	
	1	400Δ	M	0,77	265	445	65	
	1	400Δ	H	0,80	300	440	65	70
	2	400Y	L	0,30	150	374	63	
	2	400Y	M	0,33	165	360	61	
	2	400Y	H	0,36	180	347	60	


12-800/36 3~ 400V 50Hz

Is/In= 2,5



Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRST/12-800/36	3	400Δ	L	1,39	380	450	68	
	3	400Δ	M	1,40	390	450	67	
	3	400Δ	H	1,40	400	445	67	60
	4	400Y	L	0,54	225	375	62	
	4	400Y	M	0,55	230	370	61	
	4	400Y	H	0,56	235	365	60	

Dimensions and Construction Dimensiones y Construcción

Airflow
B ←



Type / Tipo	A	B
28°	93	165
36°	117	188

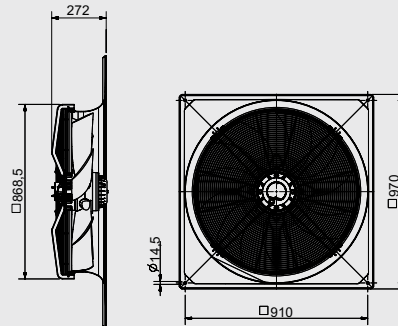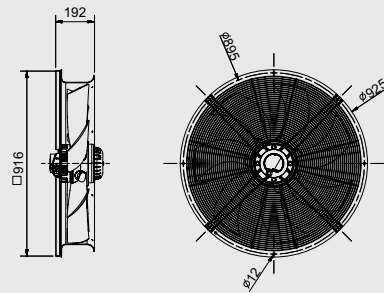

S



Q



Z



Weight/Peso (Kg)

Type / Tipo	S	PN	Q	Z
HRST/12-800/28	28	38	46	46
HRST/12-800/36	29	39	47	47