

910 mm Ø

12 POLES/POLOS



Characteristics / Características

12-910/28 3~ 400V 50Hz

Is/In= 3,25

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRST/12-910/28	1	400Δ	L	1,67	450	450	65	
	1	400Δ	M	1,70	490	445	63	
	1	400Δ	H	1,70	485	440	62	65
	2	400Y	L	0,66	265	365	62	
	2	400Y	M	0,69	275	350	59	
	2	400Y	H	0,70	280	345	57	


12-910/36 3~ 400V 50Hz

Is/In= 3,25


Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRST/12-910/36	3	400Δ	L	2,13	660	450	68	
	3	400Δ	M	2,14	675	445	65	
	3	400Δ	H	2,20	685	440	65	60
	4	400Y	L	0,96	400	370	61	
	4	400Y	M	0,96	410	365	60	
	4	400Y	H	0,98	415	360	60	

Dimensions and Construction Dimensiones y Construcción


Airflow
B ←



Type / Tipo	A	B
28°	113	188
36°	128	225

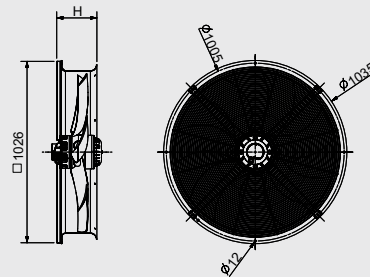

Type / Tipo	H
28°	222
36°	227

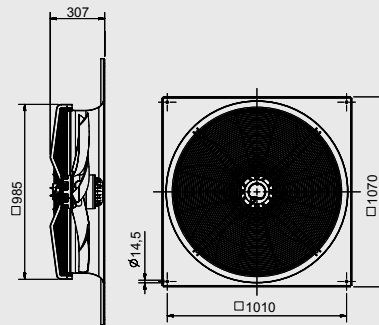

Weight/Peso (Kg)

Type / Tipo	S	PN	Q	Z
HRST/12-910/28	31	41	54	58
HRST/12-910/36	33	43	56	60

S



Q



Z

