

710 mm Ø

6 POLES/POLOS



Characteristics / Características

6-710/24 3~ 400V 50Hz

Is/In= 3,5

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRST/6-710/24	1	400Δ	L	1,55	730	929	76	
	1	400Δ	M	1,70	898	911	73	
	1	400Δ	H	1,80	1000	900	73	70
	2	400Y	L	1,1	560	787	74	
	2	400Y	M	1,2	650	748	71	
	2	400Y	H	1,32	680	710	70	

6-710/28 3~ 400V 50Hz

Is/In= 3,2

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRST/6-710/28	3	400Δ	L	1,85	1040	955	76	
	3	400Δ	M	2,14	1120	940	74	
	3	400Δ	H	2,30	1200	935	74	65
	4	400Y	L	1,18	725	865	74	
	4	400Y	M	1,22	760	840	71	
	4	400Y	H	1,31	810	840	71	


6-710/33 3~ 400V 50Hz

Is/In= 3,1



Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRST/6-710/33	5	400Δ	L	2,40	1210	923	78	
	5	400Δ	M	2,55	1270	920	76	
	5	400Δ	H	2,60	1300	916	76	70
	6	400Y	L	1,50	899	781	74	
	6	400Y	M	1,53	907	768	72	
	6	400Y	H	1,60	920	760	72	

Dimensions and Construction Dimensiones y Construcción

Airflow
B ←

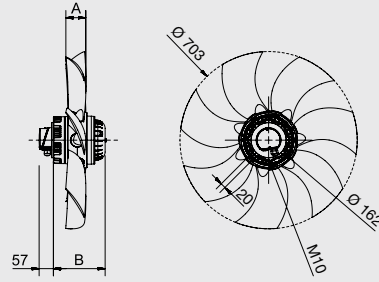

Type / Tipo	A	B
24°	80	188
28°	87	205
32°	96	205

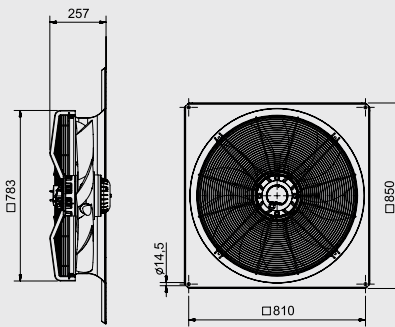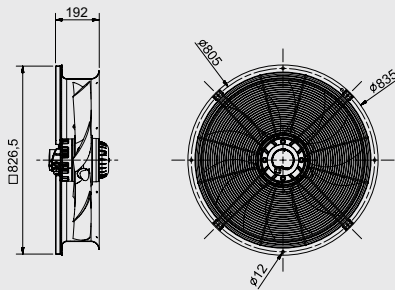

Weight/Peso (Kg)

Type / Tipo	S	PN	Q	Z
HRST/6-710/24	26	35	40	41
HRST/6-710/28	26	35	40	41
HRST/6-710/33	28	37	42	43