

# 910 mm Ø

## 6 POLES/POLOS



### Characteristics / Características

6-910/15 3~ 400V 50Hz

Is/In= 3,9

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRST/6-910/15	1	400Δ	L	2,92	1375	925	82	
	1	400Δ	M	3,40	1750	900	80	
	1	400Δ	H	3,50	1920	900	82	70
	2	400Y	L	1,75	980	715	78	
	2	400Y	M	2,00	1140	710	76	
	2	400Y	H	2,10	1170	690	74	

6-910/30 3~ 400V 50Hz

Is/In= 3


Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRST/6-910/30	1	400Δ	L	5,84	3050	880	86	
	1	400Δ	M	6,17	3150	865	86	
	1	400Δ	H	6,20	3200	860	87	50
	2	400Y	L	2,98	1890	710	79	
	2	400Y	M	3,43	1980	695	79	
	2	400Y	H	3,50	2000	680	79	

### Dimensions and Construction Dimensiones y Construcción



Airflow





HRST/6-910/15

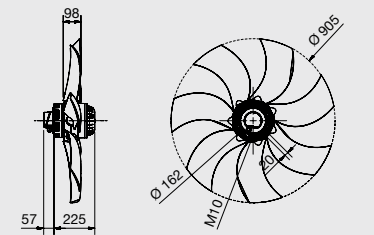


S

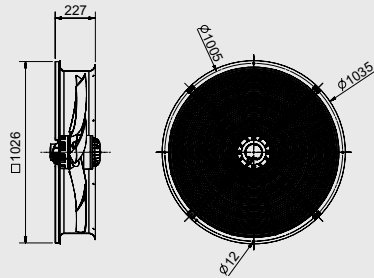


Q

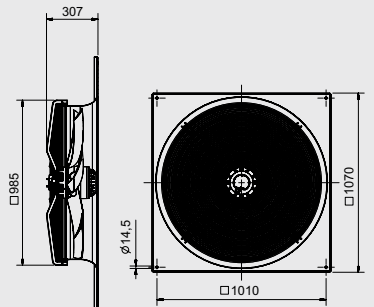



Z




HRST/6-910/30

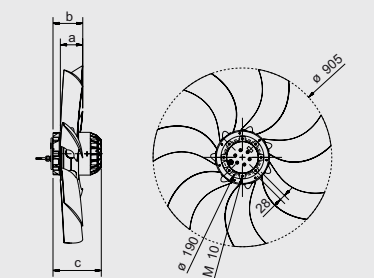

S

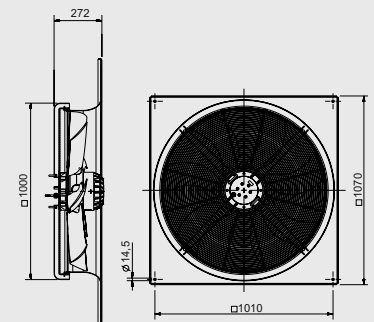

Z



Weight/Peso (Kg)

Type / Tipo	S	PN	Q	Z
HRST/6-910/15	50	61	73	74
HRST/6-910/30	50	61	73	74