
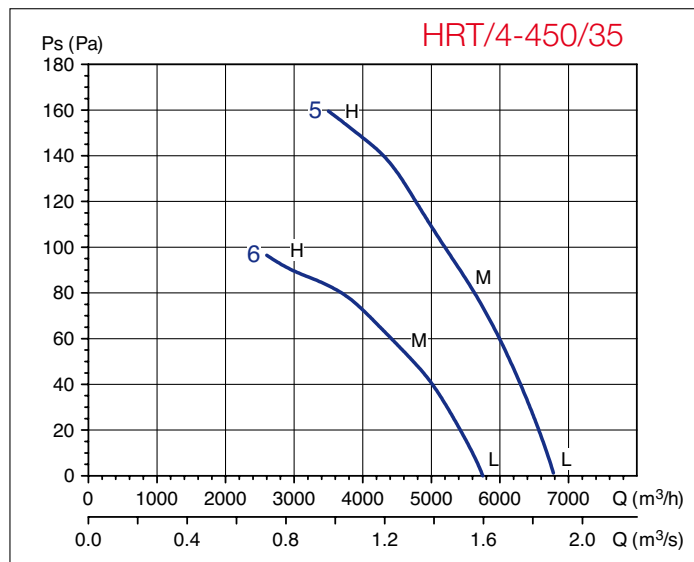
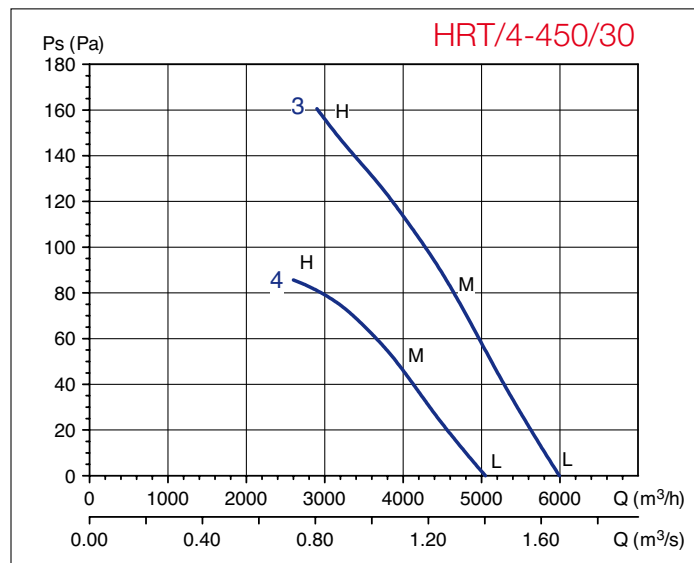


450 mm Ø

4 POLES/POLOS

Technical curves / Curvas características

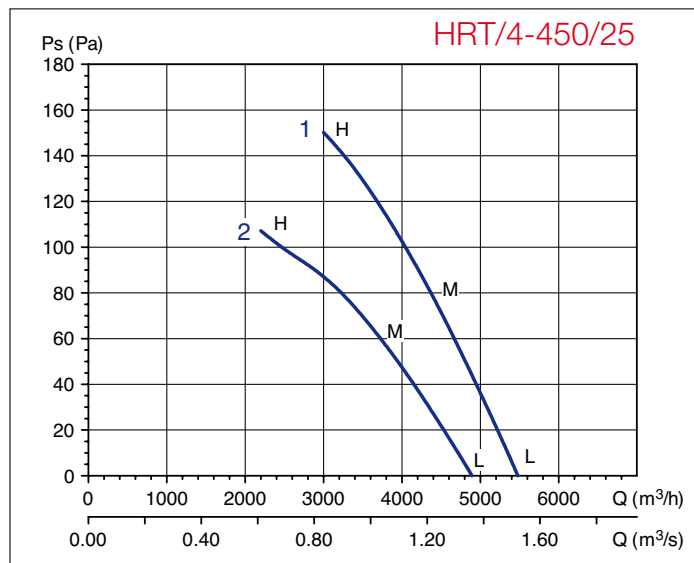

Acoustic Characteristics / Características acústicas

Sound power level spectrum dB(A) at octave average frequencies (Hz) measured at the fan inlet

Espectros de potencia sonora en dB(A) en aspiración con conducto a la descarga

		Frecuencia (HZ)							
		63	125	250	500	1000	2000	4000	8000
HRT/4-450/25 Δ	L	42	54	60	65	67	66	62	56
	M	39	51	57	62	64	63	59	53
	H	46	54	59	63	65	64	60	53
HRT/4-450/25 Y	L	40	52	58	63	65	64	60	54
	M	36	48	54	59	61	60	56	50
	H	42	50	55	59	61	60	56	49

		Frecuencia (HZ)							
		63	125	250	500	1000	2000	4000	8000
HRT/4-450/35 Δ	L	44	56	62	67	69	68	64	58
	M	45	57	63	68	70	69	65	59
	H	55	63	68	72	74	73	69	62
HRT/4-450/35 Y	L	41	53	59	64	66	65	61	55
	M	40	52	58	63	65	64	60	54
	H	50	58	63	67	69	68	64	57

		Frecuencia (HZ)							
		63	125	250	500	1000	2000	4000	8000
HRT/4-450/30 Δ	L	43	55	61	66	68	67	63	57
	M	45	57	63	68	70	69	65	59
	H	56	64	69	73	75	74	70	63
HRT/4-450/30 Y	L	39	51	57	62	64	63	59	53
	M	41	53	59	64	66	65	61	55
	H	51	59	64	68	70	69	65	58



Características a título informativo. Soler & Palau se reserva el derecho a modificarlas sin previo aviso.

Technical specifications for information purposes only. Soler & Palau reserves the right to change them without any previous notice.