
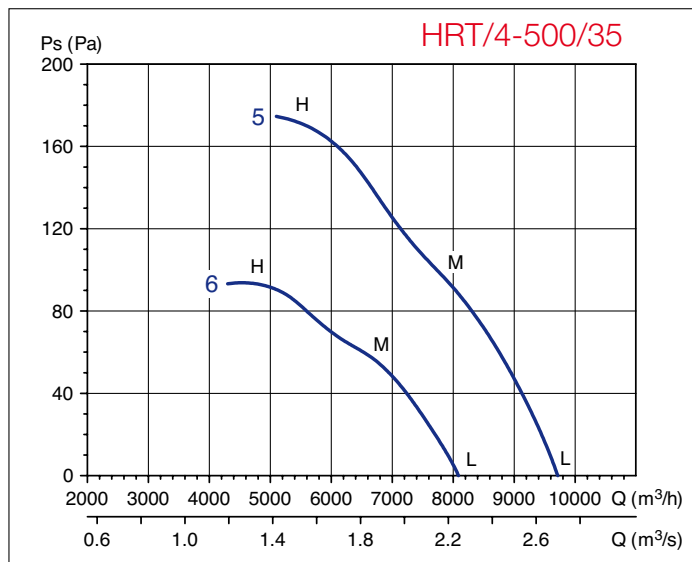
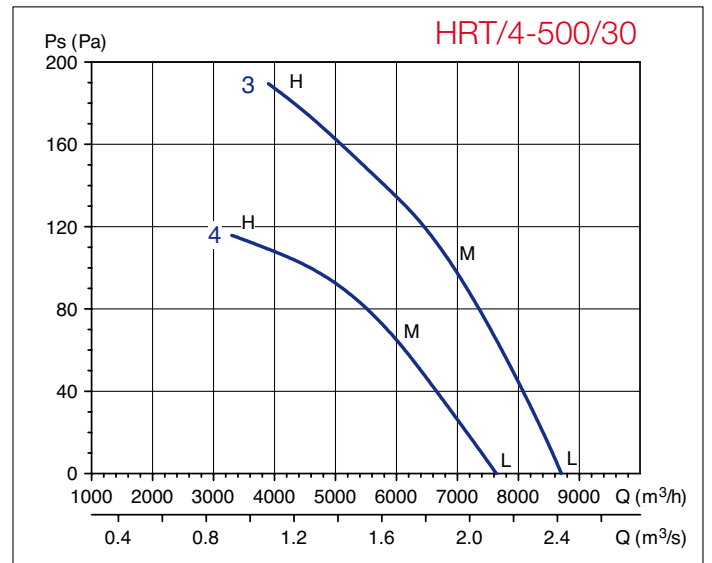


# 500 mm Ø

## 4 POLES/POLOS

### Technical curves / Curvas características

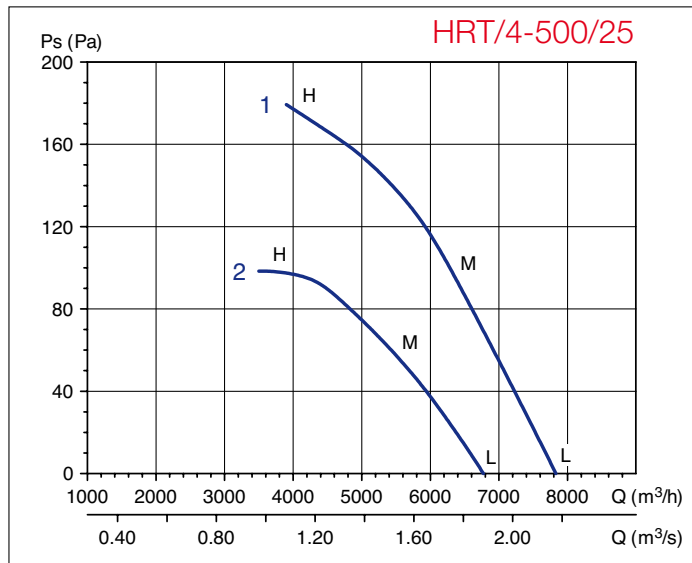

### Acoustic Characteristics / Características acústicas

Sound power level spectrum dB(A) at octave average frequencies (Hz) measured at the fan inlet  
Espectros de potencia sonora en dB(A) en aspiración con conducto a la descarga

	Frecuencia (HZ)								
	63	125	250	500	1000	2000	4000	8000	
HRT/4-500/25 Δ	L	44	56	62	67	69	68	64	58
	M	43	55	61	66	68	67	63	57
	H	51	59	64	68	70	69	65	58
HRT/4-500/25 Y	L	41	53	59	64	66	65	61	55
	M	40	52	58	63	65	64	60	54
	H	47	55	60	64	66	65	61	54

	Frecuencia (HZ)								
	63	125	250	500	1000	2000	4000	8000	
HRT/4-500/35 Y	L	47	59	65	70	72	71	67	61
	M	48	60	66	71	73	72	68	62
	H	57	65	70	74	76	75	71	64
HRT/4-500/35 Y	L	43	55	61	66	68	67	63	57
	M	44	56	62	67	69	68	64	58
	H	52	60	65	69	71	70	66	59

	Frecuencia (HZ)								
	63	125	250	500	1000	2000	4000	8000	
HRT/4-500/30 Δ	L	46	58	64	69	71	70	66	60
	M	48	60	66	71	73	72	68	62
	H	58	66	71	75	77	76	72	65
HRT/4-500/30 Y	L	43	55	61	66	68	67	63	57
	M	44	56	62	67	69	68	64	58
	H	54	62	67	71	73	72	68	61



Características a título informativo. Soler & Palau se reserva el derecho a modificarlas sin previo aviso.

Technical specifications for information purposes only. Soler & Palau reserves the right to change them without any previous notice.