
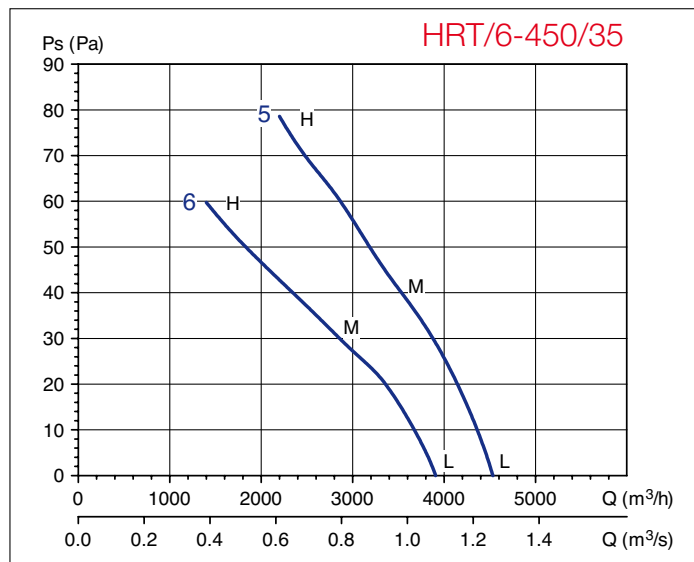
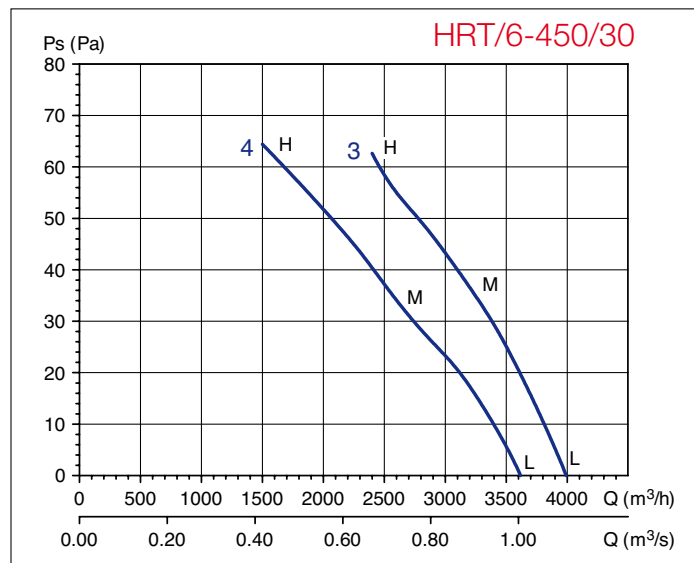


# 450 mm Ø

## 6 POLES/POLOS

### Technical curves / Curvas características

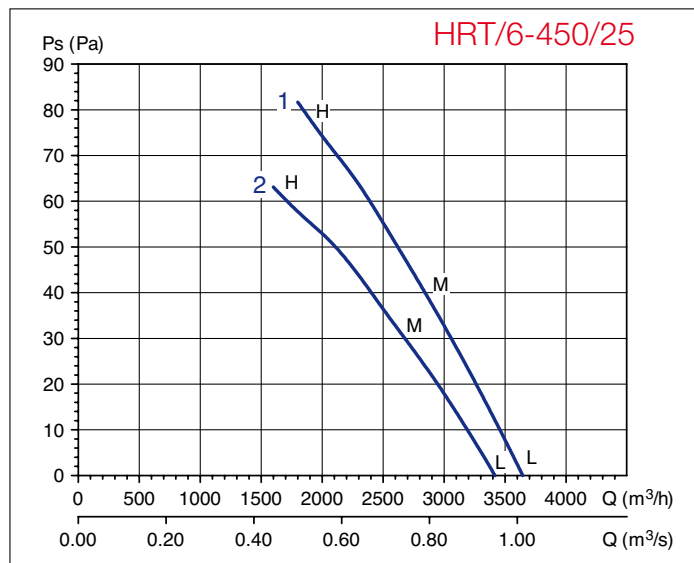

### Acoustic Characteristics / Características acústicas

Sound power level spectrum dB(A) at octave average frequencies (Hz) measured at the fan inlet  
Espectros de potencia sonora en dB(A) en aspiración con conducto a la descarga

		Frecuencia (HZ)							
		63	125	250	500	1000	2000	4000	8000
HRT/6-450/25 Δ	L	41	46	51	55	57	56	50	44
	M	38	43	48	52	54	53	47	41
	H	40	47	51	53	55	53	49	42
HRT/4-450/25 Y	L	39	44	49	53	55	54	48	42
	M	36	41	46	50	52	51	45	39
	H	36	43	47	49	51	49	45	38

		Frecuencia (HZ)							
		63	125	250	500	1000	2000	4000	8000
HRT/6-450/35 Δ	L	43	48	53	57	59	58	52	46
	M	43	48	53	57	59	58	52	46
	H	47	54	58	60	62	60	56	49
HRT/6-450/35 Y	L	39	44	49	53	55	54	48	42
	M	40	45	50	54	56	55	49	43
	H	42	49	53	55	57	55	51	44

		Frecuencia (HZ)							
		63	125	250	500	1000	2000	4000	8000
HRT/6-450/30 Δ	L	41	46	51	55	57	56	50	44
	M	43	48	53	57	59	58	52	46
	H	47	54	58	60	62	60	56	49
HRT/6-450/30 Y	L	39	44	49	53	55	54	48	42
	M	40	45	50	54	56	55	49	43
	H	44	51	55	57	59	57	53	46



Características a título informativo. Soler & Palau se reserva el derecho a modificarlas sin previo aviso.

Technical specifications for information purposes only. Soler & Palau reserves the right to change them without any previous notice.