

450 mm Ø

6 POLES/POLOS



Characteristics / Características

6-450/25 3~ 400V 50Hz

Is/In = 2,9

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRT/6-450/25	1	400Δ	L	0,51	140	970	62	
	1	400Δ	M	0,50	152	955	59	
	1	400Δ	H	0,52	188	940	60	70
	2	400Y	L	0,18	80	910	60	
	2	400Y	M	0,20	95	880	57	
	2	400Y	H	0,23	125	825	56	

6-450/30 3~ 400V 50Hz

Is/In = 2,7

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRT/6-450/30	3	400Δ	L	0,52	155	955	62	
	3	400Δ	M	0,52	170	945	64	
	3	400Δ	H	0,54	210	930	67	70
	4	400Y	L	0,21	100	875	60	
	4	400Y	M	0,23	125	835	61	
	4	400Y	H	0,27	155	770	64	


6-450/35 3~ 400V 50Hz

Is/In = 2,7



Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRT/6-450/35	5	400Δ	L	0,53	185	940	64	
	5	400Δ	M	0,54	205	925	64	
	5	400Δ	H	0,57	240	905	67	70
	6	400Y	L	0,23	125	815	60	
	6	400Y	M	0,26	145	770	61	
	6	400Y	H	0,30	175	705	62	

Dimensions and Construction Dimensiones y Construcción

Airflow
B ←

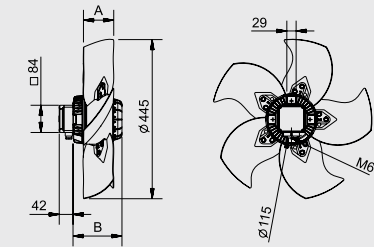


S

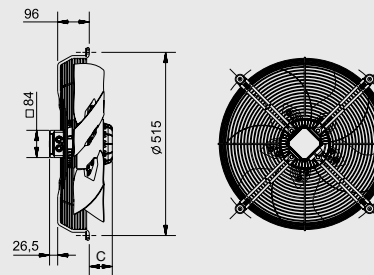


PN



Type / Tipo	A	B	C
25°	72	124	44
30°	83,5	124	44
35°	95	125	45

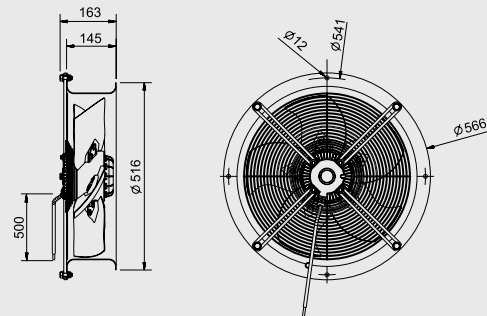

Q

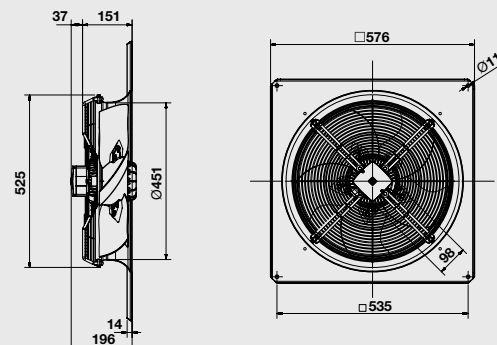

Z



Weight/Peso (Kg)

Type / Tipo	S	PN	Q	Z
HRT/6-450/25	9	11	15	17
HRT/6-450/30	9	11	15	17
HRT/6-450/35	10	12	16	18