

560 mm Ø

6 POLES/POLOS



Characteristics / Características

6-560/25 3~ 400V 50Hz

Is/In = 3,0

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRT/6-560/25	1	400Δ	L	0,56	240	915	66	
	1	400Δ	M	0,60	295	890	67	
	1	400Δ	H	0,65	330	855	70	70
	2	400Y	L	0,26	145	775	62	
	2	400Y	M	0,30	175	720	62	
	2	400Y	H	0,33	190	645	64	

6-560/30 3~ 400V 50Hz

Is/In = 2,9

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRT/6-560/30	3	400Δ	L	0,62	340	910	68	
	3	400Δ	M	0,68	360	890	69	
	3	400Δ	H	0,74	410	865	72	70
	4	400Y	L	0,32	190	745	63	
	4	400Y	M	0,35	220	710	64	
	4	400Y	H	0,39	240	645	66	



6-560/35 3~ 400V 50Hz

Is/In = 2,7



Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRT/6-560/35	5	400Δ	L	0,77	390	895	69	
	5	400Δ	M	0,83	430	875	71	
	5	400Δ	H	0,90	450	850	72	70
	6	400Y	L	0,43	240	695	63	
	6	400Y	M	0,46	275	650	64	
	6	400Y	H	0,49	290	605	66	

Dimensions and Construction Dimensiones y Construcción

Airflow
B ←

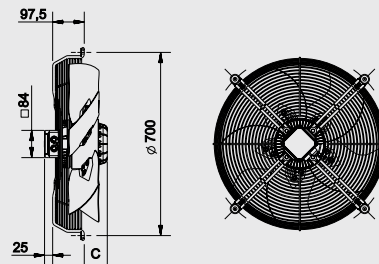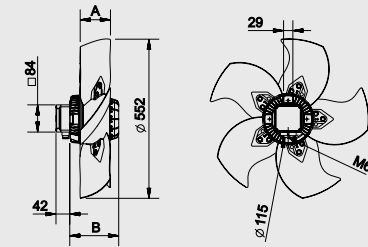

Type / Tipo	A	B	C
25°	70,5	124	44
30°	81,5	129	49
35°	93	139	59

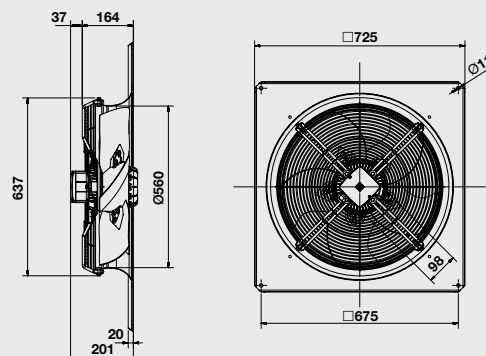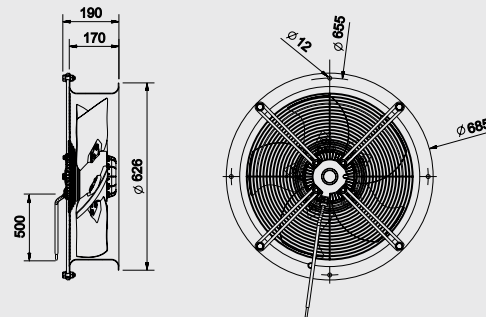

Weight/Peso (Kg)

Type / Tipo	S	PN	Q	Z
HRT/6-560/25	10	14	19	24
HRT/6-560/30	11	15	20	25
HRT/6-560/35	11	15	20	25