
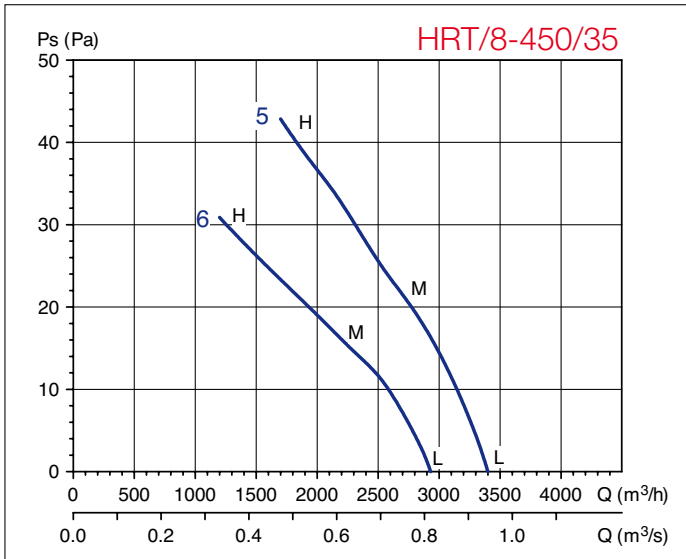
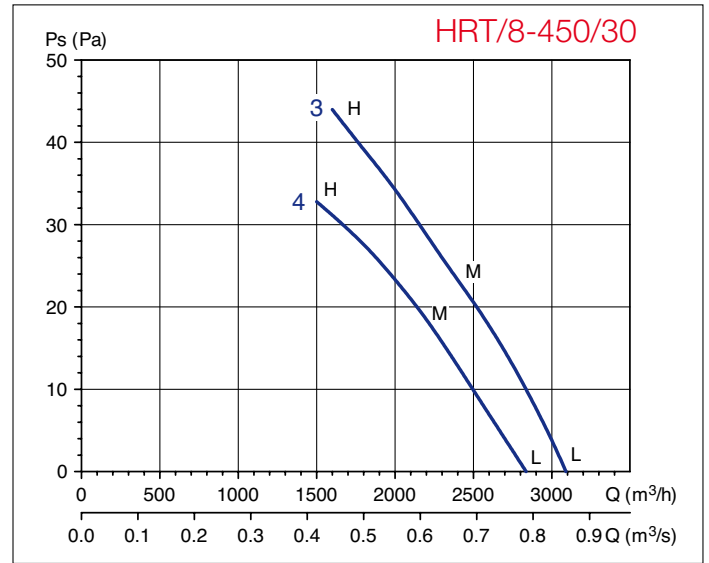


450 mm Ø

8 POLES/POLOS

Technical curves / Curvas características

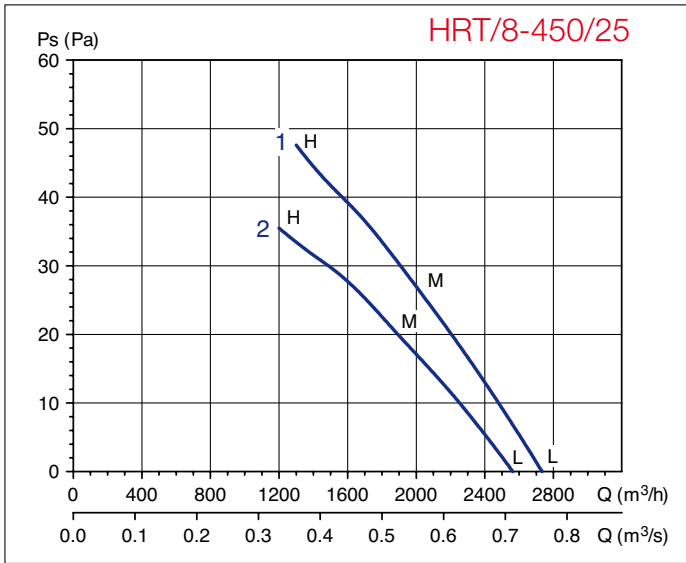

Acoustic Characteristics / Características acústicas

Sound power level spectrum dB(A) at octave average frequencies (Hz) measured at the fan inlet
Espectros de potencia sonora en dB(A) en aspiración con conducto a la descarga

	Frecuencia (HZ)								
	63	125	250	500	1000	2000	4000	8000	
HRT/8-450/25 Δ	L	37	43	46	49	51	49	43	36
	M	35	41	44	47	49	47	41	34
	H	36	42	45	47	48	45	40	33
HRT/8-450/25 Y	L	35	41	44	47	49	47	41	34
	M	33	39	42	45	47	45	39	32
	H	34	40	43	45	46	43	38	31

	Frecuencia (HZ)								
	63	125	250	500	1000	2000	4000	8000	
HRT/8-450/35 Δ	L	39	45	48	51	53	51	45	38
	M	39	45	48	51	53	51	45	38
	H	44	50	53	55	56	53	48	41
HRT/8-450/35 Y	L	36	42	45	48	50	48	42	35
	M	36	42	45	48	50	48	42	35
	H	39	45	48	50	51	48	43	36

	Frecuencia (HZ)								
	63	125	250	500	1000	2000	4000	8000	
HRT/8-450/30 Δ	L	37	43	46	49	51	49	43	36
	M	38	44	47	50	52	50	44	37
	H	43	49	52	54	55	52	47	40
HRT/8-450/30 Y	L	35	41	44	47	49	47	41	34
	M	36	42	45	48	50	48	42	35
	H	41	47	50	52	53	50	45	38



Características a título informativo. Soler & Palau se reserva el derecho a modificarlas sin previo aviso.

Technical specifications for information purposes only. Soler & Palau reserves the right to change them without any previous notice.