
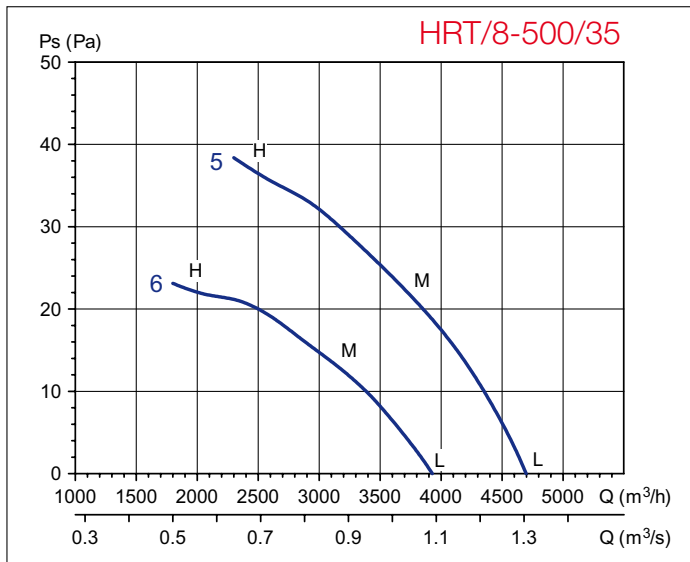
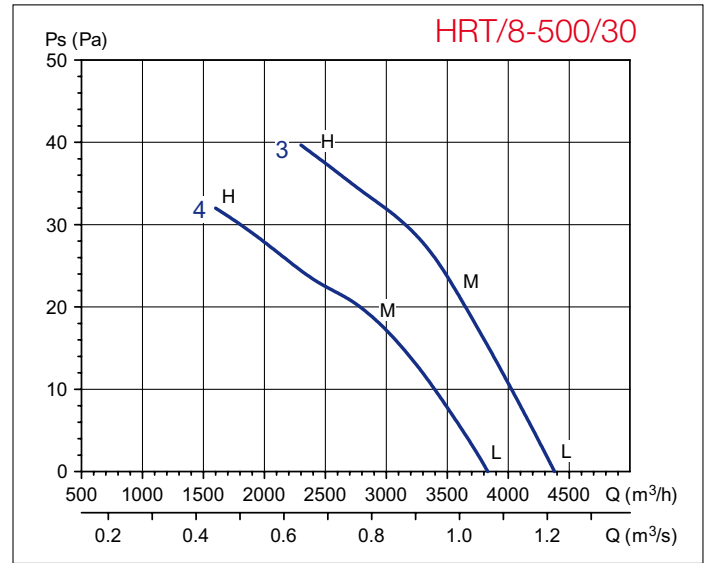


500 mm Ø

8 POLES/POLOS

Technical curves / Curvas características

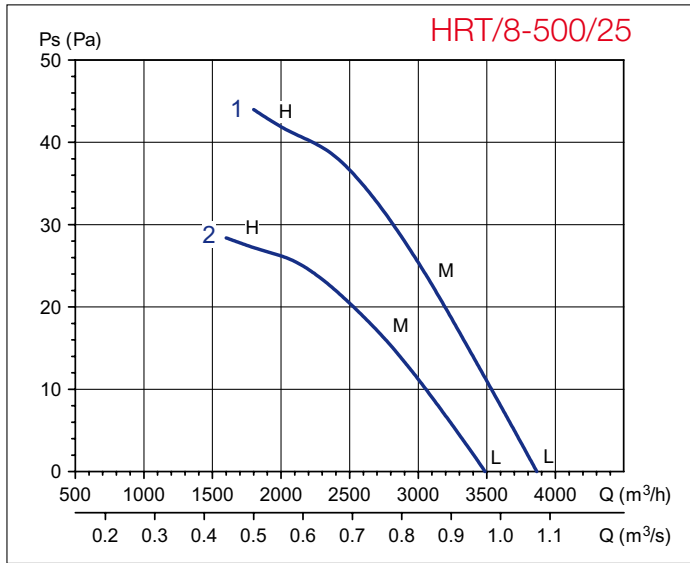

Acoustic Characteristics / Características acústicas

Sound power level spectrum dB(A) at octave average frequencies (Hz) measured at the fan inlet
Espectros de potencia sonora en dB(A) en aspiración con conducto a la descarga

		Frecuencia (HZ)							
		63	125	250	500	1000	2000	4000	8000
HRT/8-500/25 Δ	L	39	45	48	51	53	51	45	38
	M	39	45	48	51	53	51	45	38
	H	42	48	51	53	54	51	46	39
HRT/8-500/25 Y	L	37	43	46	49	51	49	43	36
	M	36	42	45	48	50	48	42	35
	H	38	44	47	49	50	47	42	35

		Frecuencia (HZ)							
		63	125	250	500	1000	2000	4000	8000
HRT/8-500/30 Δ	L	42	48	51	54	56	54	48	41
	M	42	48	51	54	56	54	48	41
	H	46	52	55	57	58	55	50	43
HRT/8-500/35 Y	L	37	43	46	49	51	49	43	36
	M	38	44	47	50	52	50	44	37
	H	41	47	50	52	53	50	45	38

		Frecuencia (HZ)							
		63	125	250	500	1000	2000	4000	8000
HRT/8-500/30 Δ	L	40	46	49	52	54	52	46	39
	M	41	47	50	53	55	53	47	40
	H	45	51	54	56	57	54	49	42
HRT/8-500/30 Y	L	37	43	46	49	51	49	43	36
	M	37	43	46	49	51	49	43	36
	H	42	48	51	53	54	51	46	39



Características a título informativo. Soler & Palau se reserva el derecho a modificarlas sin previo aviso.

Technical specifications for information purposes only. Soler & Palau reserves the right to change them without any previous notice.