

560 mm Ø

8 POLES/POLOS



Characteristics / Características

8-560/25 3~ 400V 50Hz

Is/In = 3,1

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRT/8-560/25	1	400Δ	L	0,47	152	680	61	
	1	400Δ	M	0,48	166	672	62	
	1	400Δ	H	0,50	195	650	64	70
	2	400Y	L	0,33	86	574	56	
	2	400Y	M	0,34	95	540	56	
	2	400Y	H	0,36	100	500	58	

8-560/30 3~ 400V 50Hz

Is/In = 3,0

Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRT/8-560/30	3	400Δ	L	0,49	160	670	63	
	3	400Δ	M	0,50	175	660	62	
	3	400Δ	H	0,52	205	640	65	70
	4	400Y	L	0,35	90	565	58	
	4	400Y	M	0,36	100	530	57	
	4	400Y	H	0,38	105	485	59	



8-560/35 3~ 400V 50Hz

Is/In = 3,0



Type / Tipo	Curve Curva	Voltage Tensión (V)	Point Punto	I (A)	P (W)	N (rpm)	LwA dB (A)	Tmax. (°C)
HRT/8-560/35	5	400Δ	L	0,72	211	690	63	
	5	400Δ	M	0,75	230	680	64	
	5	400Δ	H	0,80	270	660	66	70
	6	400Y	L	0,54	120	580	57	
	6	400Y	M	0,55	132	550	58	
	6	400Y	H	0,58	140	500	60	

Dimensions and Construction Dimensiones y Construcción

Airflow
B ←

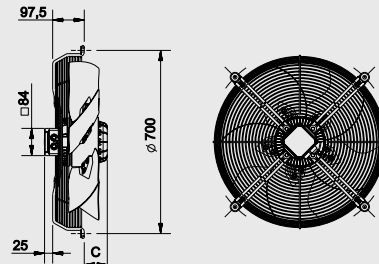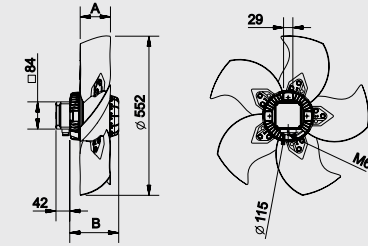

Type / Tipo	A	B	C
25°	70,5	124	44
30°	81,5	124	44
35°	93	139	59

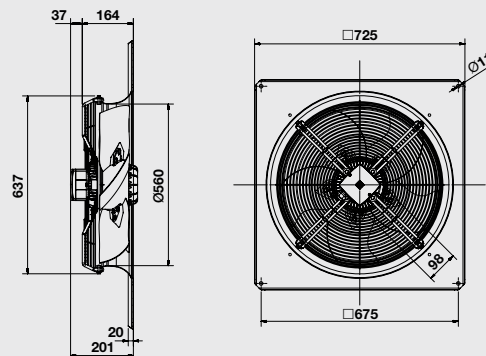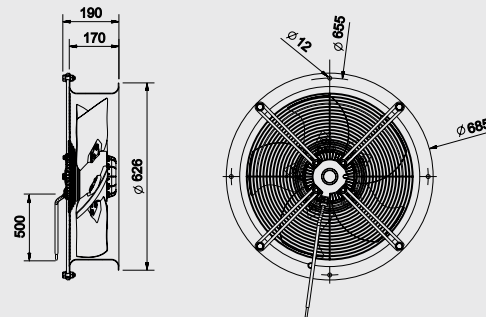

Weight/Peso (Kg)

Type / Tipo	S	PN	Q	Z
HRT/8-560/25	8	12	17	22
HRT/8-560/30	9	13	18	23
HRT/8-560/35	10	14	19	24