Diameter: **400 mm**

R11_-4035_-4T2-5745

Nominal data according to standard EN 60335:	
Phase	3~
Nominal voltage	400 V
Frequency	50 Hz
Speed	high/low
Rated power input	260/190 W
Rated current	0,60/0,30 A
Rated speed	1380/1160 RPM
Min. ambient temperature	-30 °C
Max. ambient temperature	70/70 °C
Sound power level A weighted	75/71 dB (A)
Connection	terminal box
Insulation class	155
Protection class	IP54

ErP data according to EU regulation 327/2011:	
Overall efficiency	29.1 %
Measurement category	A
Efficiency category	static
Efficiency grade N	38.8
Variable speed drive	NO
Power input	289 W
Air flow	3585 m³/h
Pressure drop	87 Pa
Speed	1382 RPM
Specific ratio	1.00

Fan with guard grill

Airflow Direction	Type	Code	Weight (kg)
Sucking	R11R-4035A-4T2-5745	0311-1-0159	6.3
Blowing	R11R-4035P-4T2-5745	0311-4-0049	

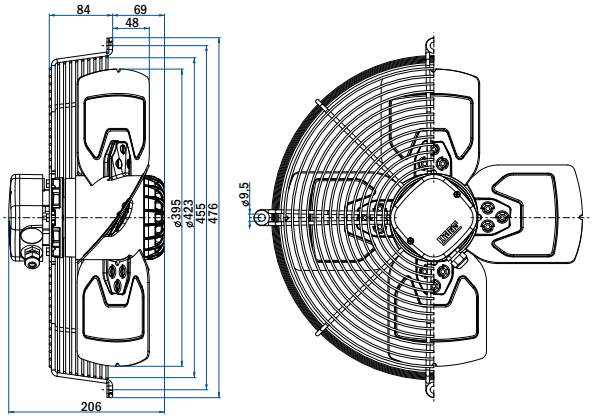

Fan with plate

Airflow Direction	Type	Code	Weight (kg)
Sucking	R11P-4035A-4T2-5745	On request	
Blowing	R11P-4035P-4T2-5745	On request	

Fan without guard grill

Airflow Direction	Type	Code	Weight (kg)
Sucking	R11E-4035A-4T2-5745	On request	
Blowing	R11E-4035P-4T2-5745	On request	

Aerodynamic characteristic

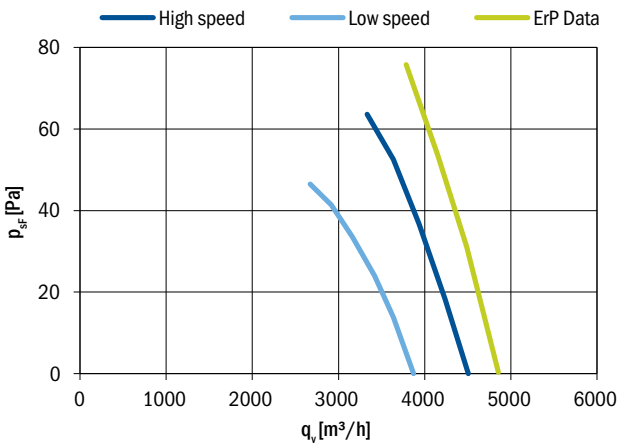

Fan characteristic measured in short bell mouth with guard grillErP characteristic measured in full bell mouth without guard grill

General notes

Connection diagram: Sucking	0301-1-0048	Page 146
Blowing	0301-1-0048	
Accessories		Page 134
Compliant to standards		Page 28