



2VRE45 300V P/N B22-B7

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature	ErP 2013	ErP 2015
V	Hz	W	A	μF	m³/h	RPM	dBA		Min / Max		
230	50	181	0,79	6,0	2 625	2 650	74	R	-20°C / +70°C	OK	OK
230	60	261	1,14	6,0	2 880	2 940	77	R	-20°C / +70°C		
230	50				1545 CFM				-4°F / +158°F		
230	50				1695 CFM				-4°F / +158°F		

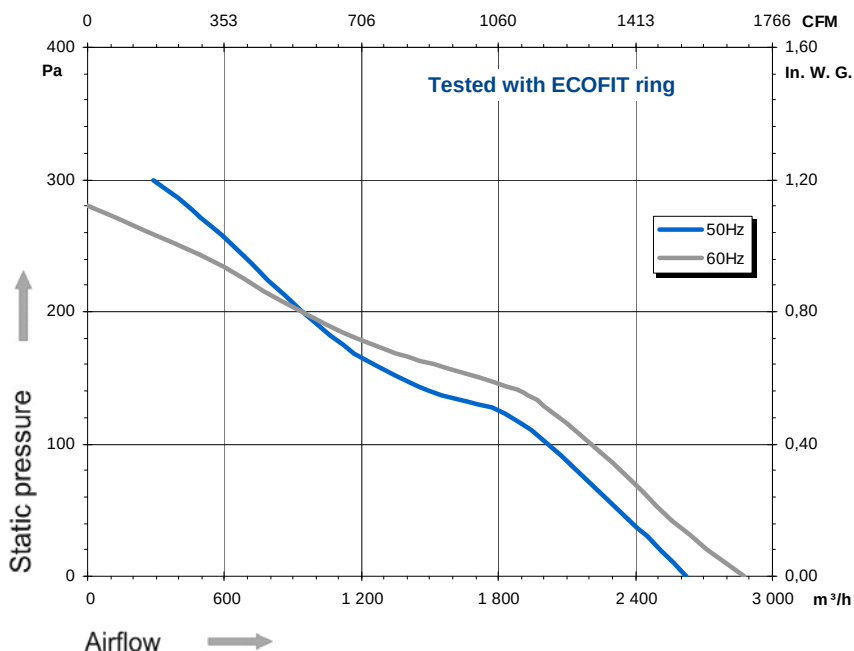

dBa : free let out

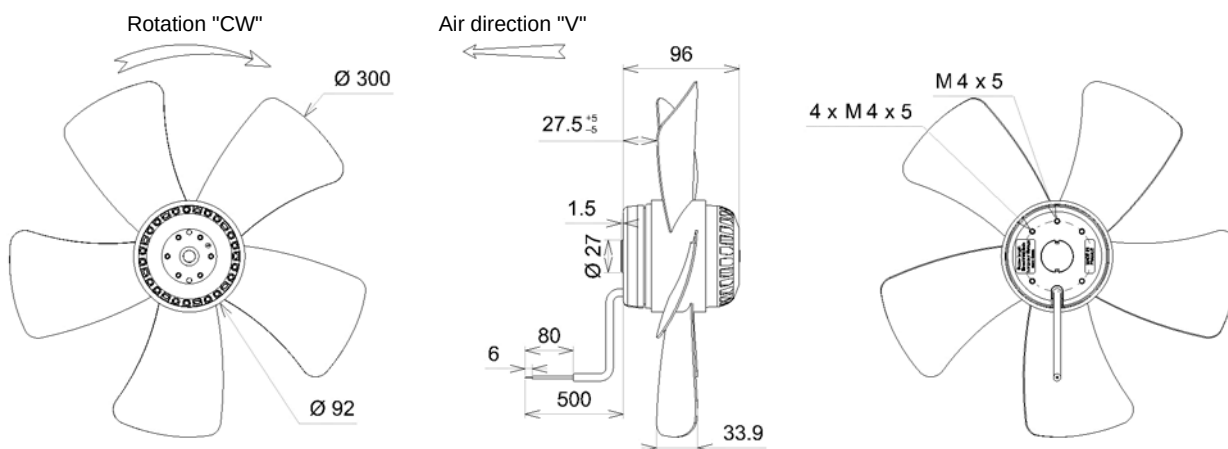

- Weight : 2,9 Kg

- Ball bearing
- Class F, thermally protected
- IP44 protection depending on installation and position as per EN60034-5
- G6.3 balancing
- Rotor and impeller : black paint

Capacitor for 50Hz	Capacitor for 60Hz	Connecting box	Connector
19016	19016	39658	09172

