
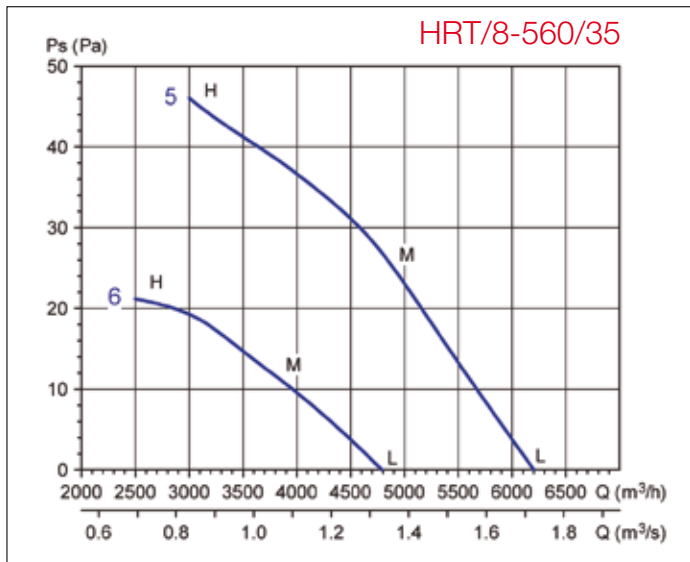
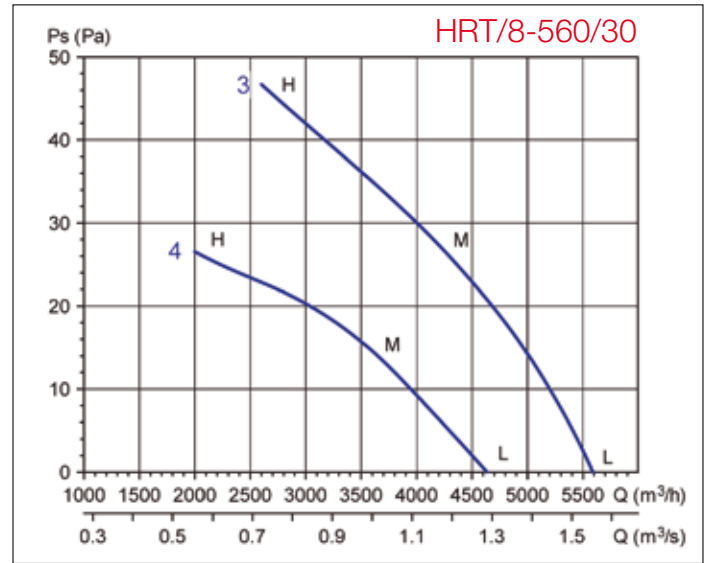


560 mm Ø

8 POLES/POLOS

Technical curves / Curvas características

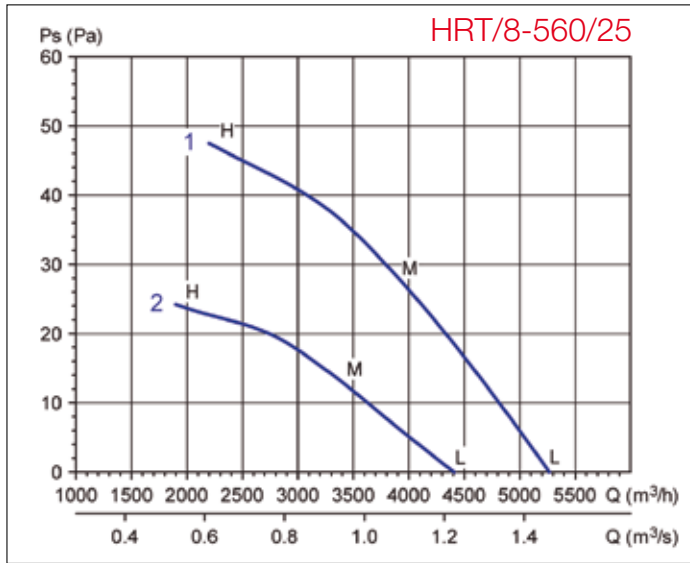

Acoustic Characteristics / Características acústicas

Sound power level spectrum dB(A) at octave average frequencies (Hz) measured at the fan inlet
Espectros de potencia sonora en dB(A) en aspiración con conducto a la descarga

	Frecuencia (HZ)								
	63	125	250	500	1000	2000	4000	8000	
HRT/8-560/25 Δ	L	42	48	51	54	56	54	48	41
	M	43	49	52	55	57	55	49	42
	H	47	53	56	58	59	56	51	44
HRT/8-560/25 Y	L	37	43	46	49	51	49	43	36
	M	37	43	46	49	51	49	43	36
	H	41	47	50	52	53	50	45	38

	Frecuencia (HZ)								
	63	125	250	500	1000	2000	4000	8000	
HRT/8-560/35 Δ	L	44	50	53	56	58	56	50	43
	M	45	51	54	57	59	57	51	44
	H	49	55	58	60	61	58	53	46
HRT/8-560/35 Y	L	44	50	53	56	58	56	50	43
	M	45	51	54	57	59	57	51	44
	H	49	55	58	60	61	58	53	46

	Frecuencia (HZ)								
	63	125	250	500	1000	2000	4000	8000	
HRT/8-560/30 Δ	L	44	50	53	56	58	56	50	43
	M	43	49	52	55	57	55	49	42
	H	48	54	57	59	60	57	52	45
HRT/8-560/30 Y	L	39	45	48	51	53	51	45	38
	M	38	44	47	50	52	50	44	37
	H	42	48	51	53	54	51	46	39



Características a título informativo. Soler & Palau se reserva el derecho a modificarlas sin previo aviso.

Technical specifications for information purposes only. Soler & Palau reserves the right to change them without any previous notice.